

Büro Beleuchtung Katalog Office Lighting Catalogue

2022




CONTENTS

FREE STANDING LUMINAIRES	05
DESK FIXED LUMINAIRES	47
PENDANT LUMINAIRES	61
SURFACE MOUNTED LUMINAIRES	91
RECESSED LUMINAIRES	121
WALL MOUNTED LUMINAIRES	137

INDOOR LIGHTING


FREE STANDING LUMINAIRES

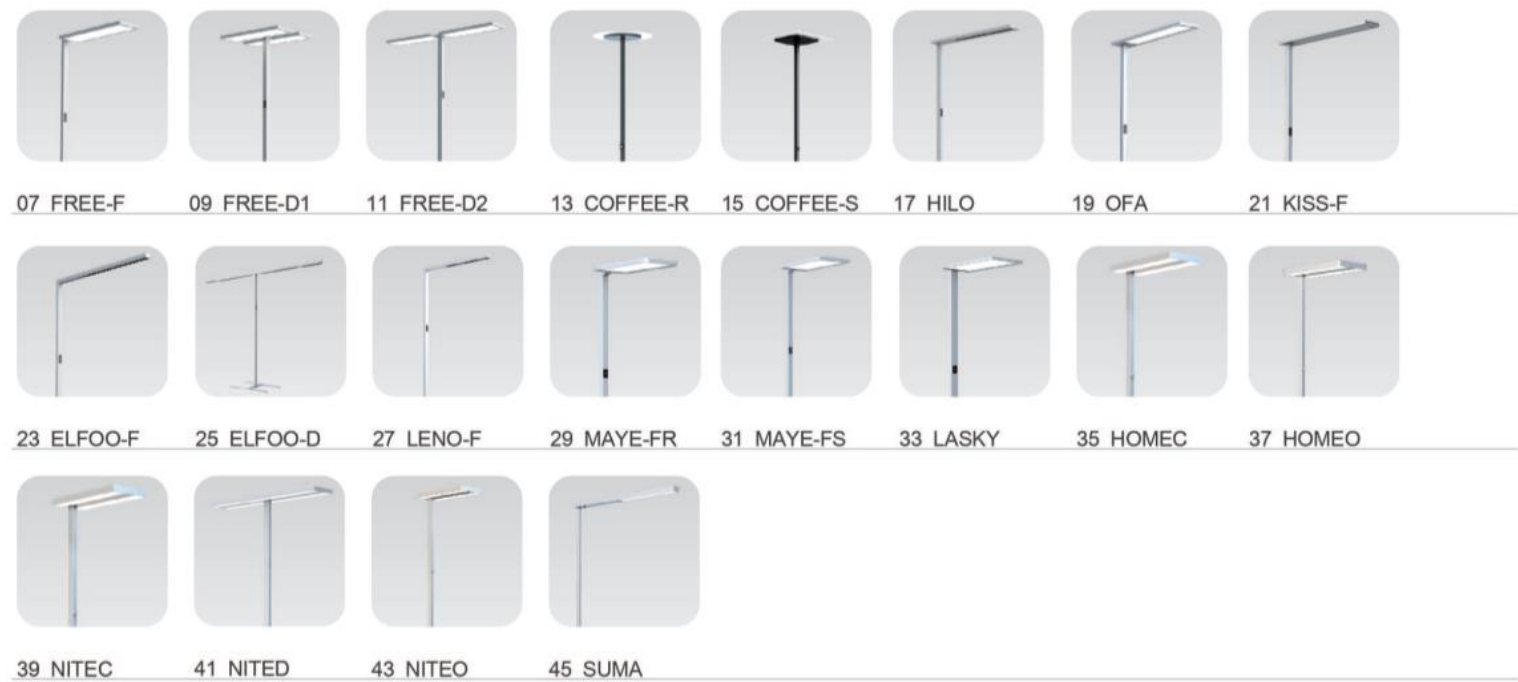


DESK FIXED LUMINAIRES



PENDANT LUMINAIRES

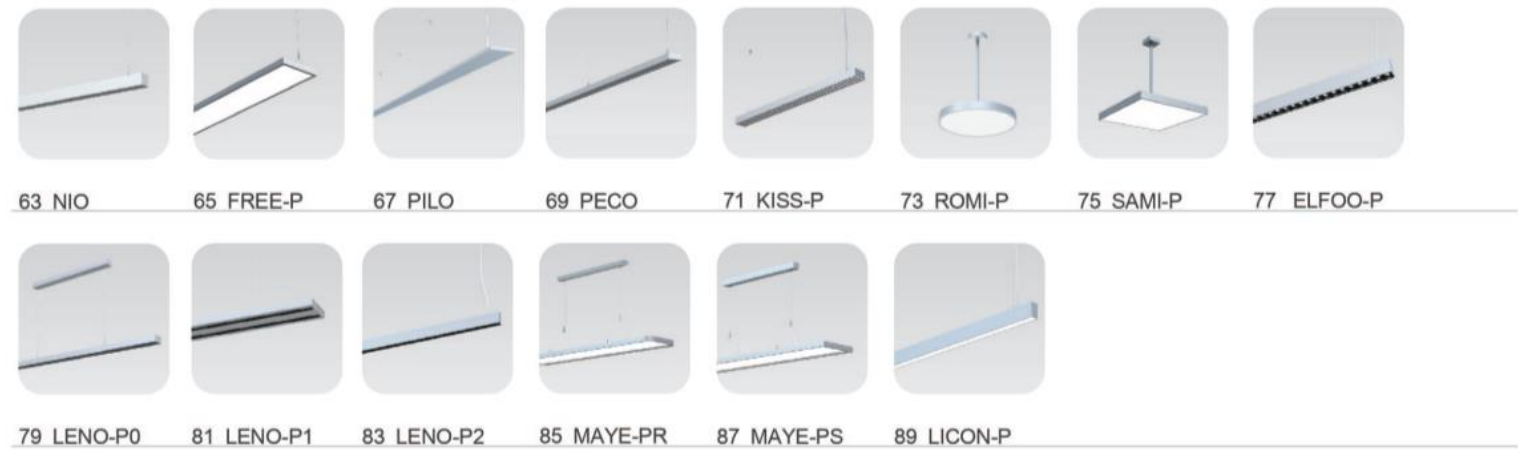

SURFACE MOUNTED LUMINAIRES

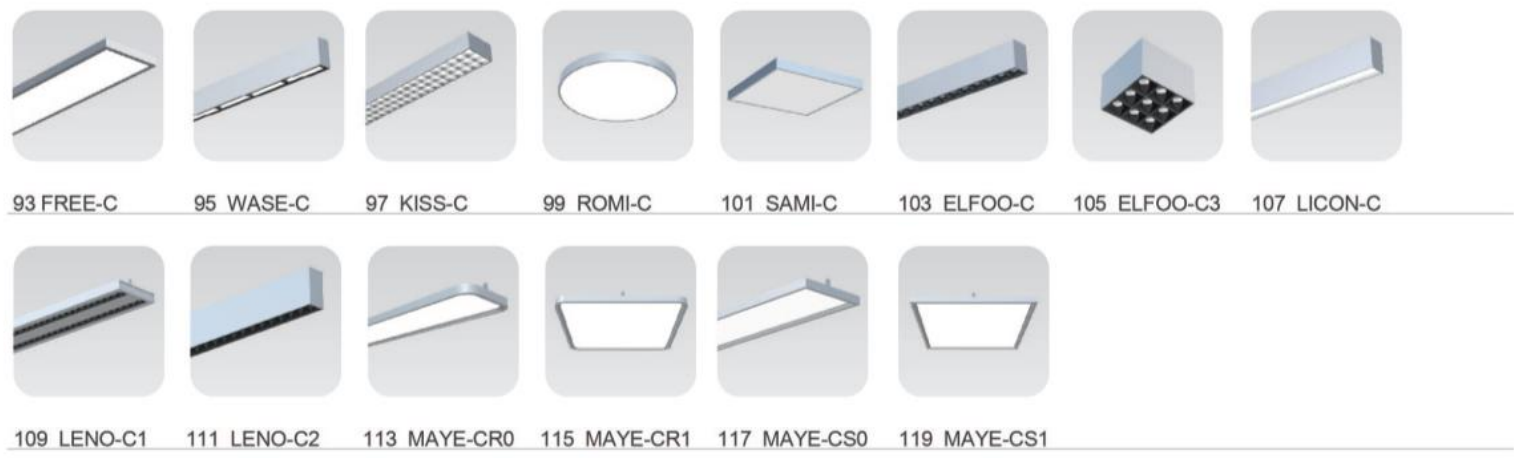

RECESSED LUMINAIRES



WALL MOUNTED LUMINAIRES





FREE STANDING LUMINAIRES



07 FREE-F




09 FREE-D1



11 FREE-D2



13 COFFEE-R



15 COFFEE-S




17 HILO



19 OFA



21 KISS-F



23 ELFOO-F



25 ELFOO-D



27 LENO-F



29 MAYE-FR



31 MAYE-FS



33 LASKY



35 HOMEC




37 HOME0



39 NITEC



41 NITED



43 NITEO



45 SUMA

FREE-F



TECHNICAL DATA



Luminaire Wattage: 80W / 100W
Luminous Flux: 10800lm / 13500lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 115^\circ / 75^\circ \downarrow$
UGR: <14
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS

Public offices and other office space.



Part No.	LM	Power	CCT
BFRF-1908024-BD	$\uparrow 7280\text{lm} / 3120\text{lm} \downarrow$	$\uparrow 56\text{W} / 24\text{W} \downarrow$	3000/4000/6000K
BFRF-1908024-CD	$\uparrow 7000\text{lm} / 3000\text{lm} \downarrow$	$\uparrow 56\text{W} / 24\text{W} \downarrow$	3000-6000K
BFRF-1910020-BD	$\uparrow 10500\text{lm} / 2800\text{lm} \downarrow$	$\uparrow 80\text{W} / 20\text{W} \downarrow$	3000/4000/6000K
BFRF-1910020-CD	$\uparrow 10500\text{lm} / 2800\text{lm} \downarrow$	$\uparrow 80\text{W} / 20\text{W} \downarrow$	3000-6000K



FREE-D1



TECHNICAL DATA



Luminaire Wattage: 160W
Luminous Flux: 19800lm / 19000lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 115^\circ / 75^\circ \downarrow$
UGR: <16
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS

Public offices and other office space.



Part No.	LM	Power	CCT
BFRD-2015045-BD-01	$\uparrow 15250\text{m}/4550\text{lm} \downarrow$	$\uparrow 105\text{W}/45\text{W} \downarrow$	3000/4000/6000K
BFRD-2015045-CD-01	$\uparrow 14800\text{lm}/4200\text{lm} \downarrow$	$\uparrow 105\text{W}/45\text{W} \downarrow$	3000-6000K



FREE-D2



TECHNICAL DATA



Luminaire Wattage: 160W
Luminous Flux: 19800lm / 19000lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 115^\circ / 75^\circ \downarrow$
UGR: <16
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS

Public offices and other office space.



Part No.	LM	Power	CCT
BFRD-2015045-BD-02	$\uparrow 115250\text{lm} / 4550\text{lm} \downarrow$	$\uparrow 105\text{W} / 45\text{W} \downarrow$	3000/4000/6000K
BFRD-2015045-CD-02	$\uparrow 114800\text{lm} / 4200\text{lm} \downarrow$	$\uparrow 105\text{W} / 45\text{W} \downarrow$	3000-6000K




COFFEE-R



TECHNICAL DATA

Luminaire Wattage: 45W
Luminous Flux: 6000lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ/90^\circ \downarrow$
UGR: <6
Protection Rating: IP20
Dimming: Push dimming
Longevity: 50,000Hrs L80 B10
Warranty: 5 years

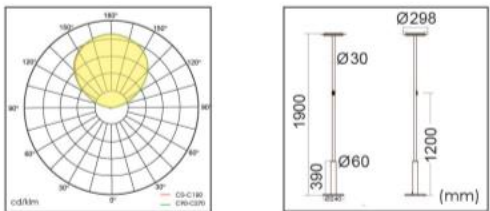

COLOURS

Silver White Black


APPLICATION AREAS

Public offices and other office space.

Part No.	LM	Power	CCT
BCRF-1904506-BN	$\uparrow 5950\text{lm}/50\text{lm} \downarrow$	$\uparrow 39\text{W}/6\text{W} \downarrow$	3000/4000/6000K




COFFEE-S

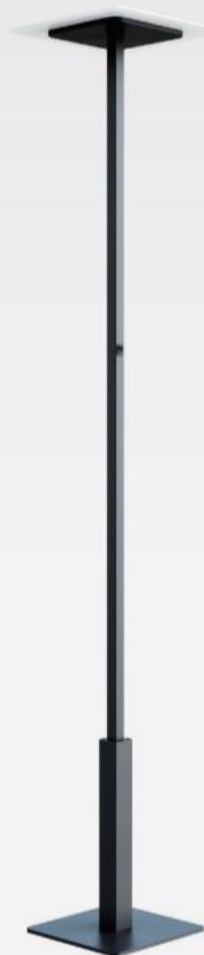

TECHNICAL DATA

Luminaire Wattage: 45W
Luminous Flux: 6200lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ/90^\circ \downarrow$
UGR: < 6
Protection Rating: IP20
Dimming: Push dimming
Longevity: 50,000Hrs L80 B10
Warranty: 5 years

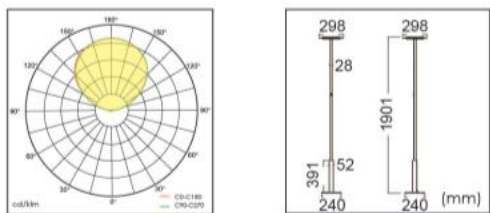

COLOURS

Silver White Black


APPLICATION AREAS

Public offices and other office space.

Part No.	LM	Power	CCT
BCSF-1904506-BN	$\uparrow 6150\text{lm}/50\text{lm} \downarrow$	$\uparrow 39\text{W}/6\text{W} \downarrow$	3000/4000/6000K





HILO

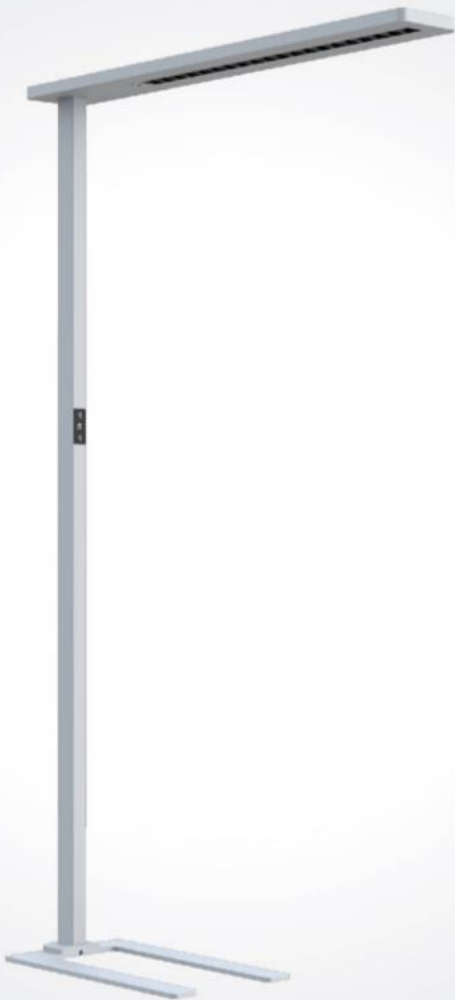

TECHNICAL DATA

Luminaire Wattage: 110W / 140W
Luminous Flux: 13700lm / 16700lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 140^\circ / 75^\circ \downarrow$ or $\uparrow 140^\circ / 50^\circ \downarrow$
UGR: <10
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years



COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space

Part No.	LM	Power	CCT
BHIF-1911015-BD	$\uparrow 12000\text{lm} / 1700\text{lm} \downarrow$	$\uparrow 95\text{W} / 15\text{W} \downarrow$	3000/4000/6000K
BHIF-1911015-CD	$\uparrow 10000\text{lm} / 1500\text{lm} \downarrow$	$\uparrow 95\text{W} / 15\text{W} \downarrow$	3000-6000K
BHIF-1914015-BD	$\uparrow 15000\text{lm} / 1700\text{lm} \downarrow$	$\uparrow 125\text{W} / 15\text{W} \downarrow$	3000/4000/6000K
BHIF-1914015-CD	$\uparrow 13000\text{lm} / 1500\text{lm} \downarrow$	$\uparrow 125\text{W} / 15\text{W} \downarrow$	3000-6000K





OFA



TECHNICAL DATA

Luminaire Wattage: 100W
Luminous Flux: 12000lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 140^\circ / 85^\circ \downarrow$
UGR: <14
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years



COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BOFF-1910025-BD	$\uparrow 9500\text{lm}/2500\text{lm} \downarrow$	$\uparrow 75\text{W}/25\text{W} \downarrow$	3000/4000/6000K
BOFF-1910025-CD	$\uparrow 8800\text{lm}/2200\text{lm} \downarrow$	$\uparrow 75\text{W}/25\text{W} \downarrow$	3000-6000K



KISS-F



TECHNICAL DATA



Luminaire Wattage: 80W / 100W
Luminous Flux: 8300lm / 10700lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 140^\circ / 85^\circ \downarrow$
UGR: <14
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space.



Part No.	LM	Power	CCT
BKIF-1908025-BD	$\uparrow 6050\text{lm}/2250\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000/4000/6000K
BKIF-1908025-CD	$\uparrow 5650\text{lm}/1850\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000-6000K
BKIF-1910025-BD	$\uparrow 8500\text{lm}/2250\text{lm} \downarrow$	$\uparrow 75\text{W}/25\text{W} \downarrow$	3000/4000/6000K
BKIF-1910025-CD	$\uparrow 7700\text{lm}/1850\text{lm} \downarrow$	$\uparrow 75\text{W}/25\text{W} \downarrow$	3000-6000K





ELFOO-F



TECHNICAL DATA

Luminaire Wattage: 80W
Luminous Flux: 9600lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 140^\circ/75^\circ \downarrow$ or $\uparrow 140^\circ/50^\circ \downarrow$
UGR: <12
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years



COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BEFF-1908020-BD	$\uparrow 7200\text{lm}/2400\text{lm} \downarrow$	$\uparrow 60\text{W}/20\text{W} \downarrow$	3000/4000/6000K
BEFF-1908020-CD	$\uparrow 6000\text{lm}/2000\text{lm} \downarrow$	$\uparrow 60\text{W}/20\text{W} \downarrow$	3000-6000K



ELFOO-D



TECHNICAL DATA



Luminaire Wattage: 150W
Luminous Flux: 18000lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 140^\circ / 75^\circ \downarrow$ or $\uparrow 140^\circ / 50^\circ \downarrow$
UGR: <12
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS


Public offices and other office space.



Part No.	LM	Power	CCT
BEFD-1915040-BD	$\uparrow 13500\text{lm} / 4500\text{lm} \downarrow$	$\uparrow 110\text{W} / 40\text{W} \downarrow$	3000/4000/6000K
BEFD-1915040-CD	$\uparrow 12300\text{lm} / 4100\text{lm} \downarrow$	$\uparrow 110\text{W} / 40\text{W} \downarrow$	3000-6000K





LENO-F

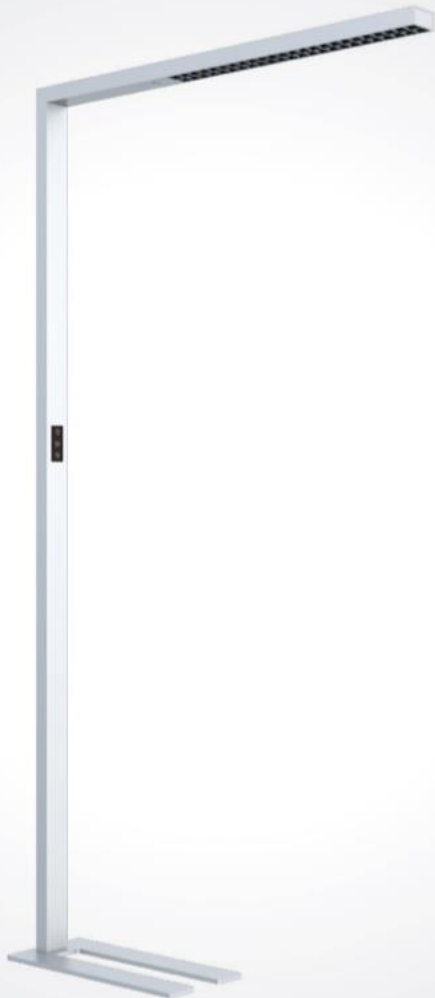

TECHNICAL DATA

Luminaire Wattage: 80W
Luminous Flux: 9600lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 50^\circ \downarrow$
UGR: <6
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years



COLOURS




APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BLEF-1908025-BD	$\uparrow 6600\text{lm}/3000\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000/4000/6000K
BLEF-1908025-CD	$\uparrow 5500\text{lm}/2500\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000-6000K




MAYE-FR

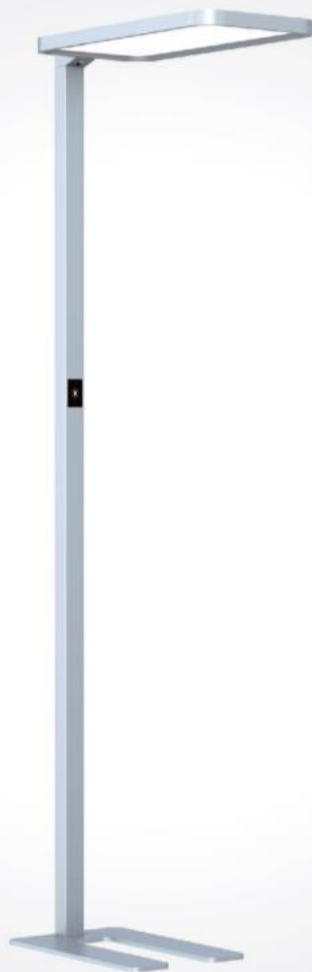

TECHNICAL DATA

Luminaire Wattage: 60W / 80W
Luminous Flux: 6000lm / 8000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

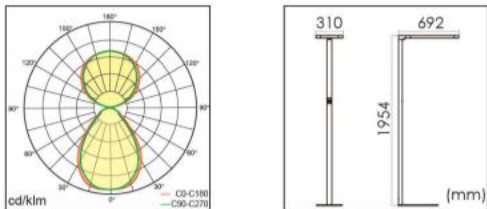

COLOURS




APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BMRF-1908030-BD	$\uparrow 3000lm/3000lm \downarrow$	$\uparrow 30W/30W \downarrow$	3000/4000/6000K
BMRF-1908030-BM	$\uparrow 3000lm/3000lm \downarrow$	$\uparrow 30W/30W \downarrow$	3000/4000/6000K
BMRF-1908030-CD	$\uparrow 2600lm/2600lm \downarrow$	$\uparrow 30W/30W \downarrow$	3000-6000K
BMRF-1908030-CM	$\uparrow 2600lm/2600lm \downarrow$	$\uparrow 30W/30W \downarrow$	3000-6000K
BMRF-1908040-BD	$\uparrow 4000lm/4000lm \downarrow$	$\uparrow 40W/40W \downarrow$	3000/4000/6000K
BMRF-1908040-BM	$\uparrow 4000lm/4000lm \downarrow$	$\uparrow 40W/40W \downarrow$	3000/4000/6000K
BMRF-1908040-CD	$\uparrow 3400lm/3400lm \downarrow$	$\uparrow 40W/40W \downarrow$	3000-6000K
BMRF-1908040-CM	$\uparrow 3400lm/3400lm \downarrow$	$\uparrow 40W/40W \downarrow$	3000-6000K



MAYE-FS

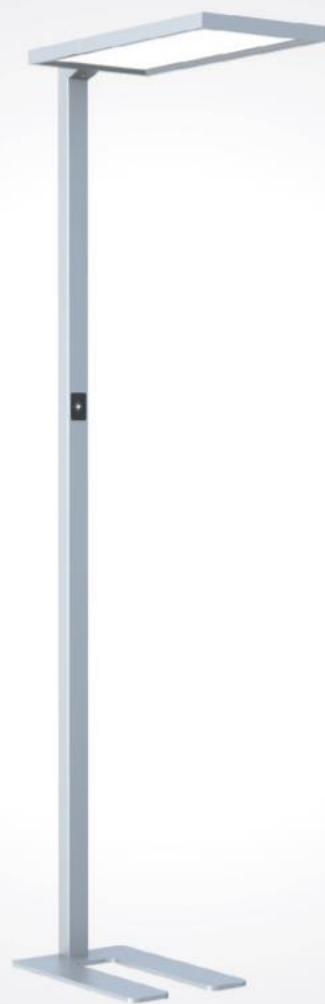

TECHNICAL DATA


Luminaire Wattage: 60W / 80W
Luminous Flux: 6000lm / 8000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS


Personal offices, public offices and other office space.

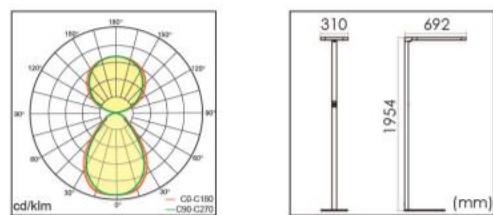

Part No.	LM	Power	CCT
BMSF-1906030-BD	↑ 3000lm/3000lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BMSF-1906030-BM	↑ 3000lm/3000lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BMSF-1906030-CD	↑ 2600lm/2600lm ↓	↑ 30W/30W ↓	3000-6000K
BMSF-1906030-CM	↑ 2600lm/2600lm ↓	↑ 30W/30W ↓	3000-6000K
BMSF-1908040-BD	↑ 4000lm/4000lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908040-BM	↑ 4000lm/4000lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908040-CD	↑ 3400lm/3400lm ↓	↑ 40W/40W ↓	3000-6000K
BMSF-1908040-CM	↑ 3400lm/3400lm ↓	↑ 40W/40W ↓	3000-6000K





LASKY

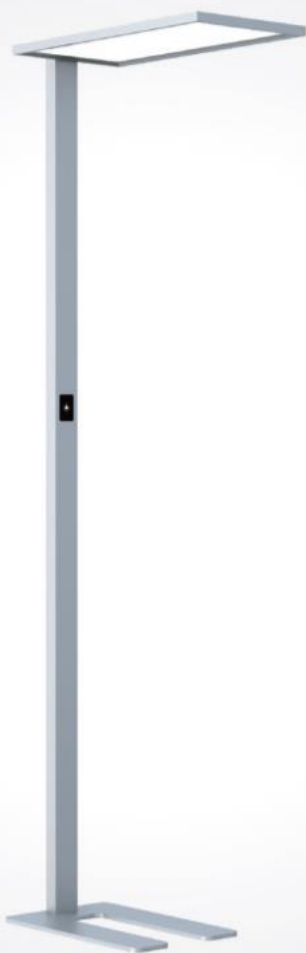

TECHNICAL DATA

Luminaire Wattage: 55W
Luminous Flux: 5500lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 160^\circ / 150^\circ \downarrow$
UGR: <22
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Warranty: 5 years



COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BLAF-1905527-BN	$\uparrow 2200\text{lm}/3300\text{lm} \downarrow$	$\uparrow 27.5\text{W}/27.5\text{W} \downarrow$	3000/4000/6000K



HOMECE



TECHNICAL DATA



Luminaire Wattage: 60W / 80W
Luminous Flux: 6600lm / 8800lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <17
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Knob dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space.



Part No.	LM	Power	CCT
BHOJ-1906030-BN	13500lm/3100lm ↓	130W/30W ↓	3000/4000/6000K
BHOJ-1906030-BM	13500lm/3100lm ↓	130W/30W ↓	3000/4000/6000K
BHOJ-1906030-BD	13500lm/3100lm ↓	130W/30W ↓	3000/4000/6000K
BHOJ-1908040-BN	14600lm/4200lm ↓	140W/40W ↓	3000/4000/6000K
BHOJ-1908040-BM	14600lm/4200lm ↓	140W/40W ↓	3000/4000/6000K
BHOJ-1908040-BD	14600lm/4200lm ↓	140W/40W ↓	3000/4000/6000K





HOMEO



TECHNICAL DATA

Luminaire Wattage: 60W / 80W
Luminous Flux: 6600lm / 8800lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <17
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Knob dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years



COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BHOF-1906030-BN	$\uparrow 3500\text{lm}/3100\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BHOF-1906030-BM	$\uparrow 3500\text{lm}/3100\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BHOF-1906030-BD	$\uparrow 3500\text{lm}/3100\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BHOF-1908040-BN	$\uparrow 4800\text{lm}/4200\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K
BHOF-1908040-BM	$\uparrow 4800\text{lm}/4200\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K
BHOF-1908040-BD	$\uparrow 4800\text{lm}/4200\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K



NITEC



TECHNICAL DATA



Luminaire Wattage: 60W / 80W
Luminous Flux: 6600lm / 8800lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <17
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Knob dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS




APPLICATION AREAS

Personal offices, public offices and other office space.



Part No.	LM	Power	CCT
BNIJ-1906030-BN	$\uparrow 3500\text{lm}/3100\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BNIJ-1906030-BM	$\uparrow 3500\text{lm}/3100\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BNIJ-1906030-BD	$\uparrow 3500\text{lm}/3100\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BNIJ-1908040-BN	$\uparrow 4600\text{lm}/4200\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K
BNIJ-1908040-BM	$\uparrow 4600\text{lm}/4200\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K
BNIJ-1908040-BD	$\uparrow 4600\text{lm}/4200\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K

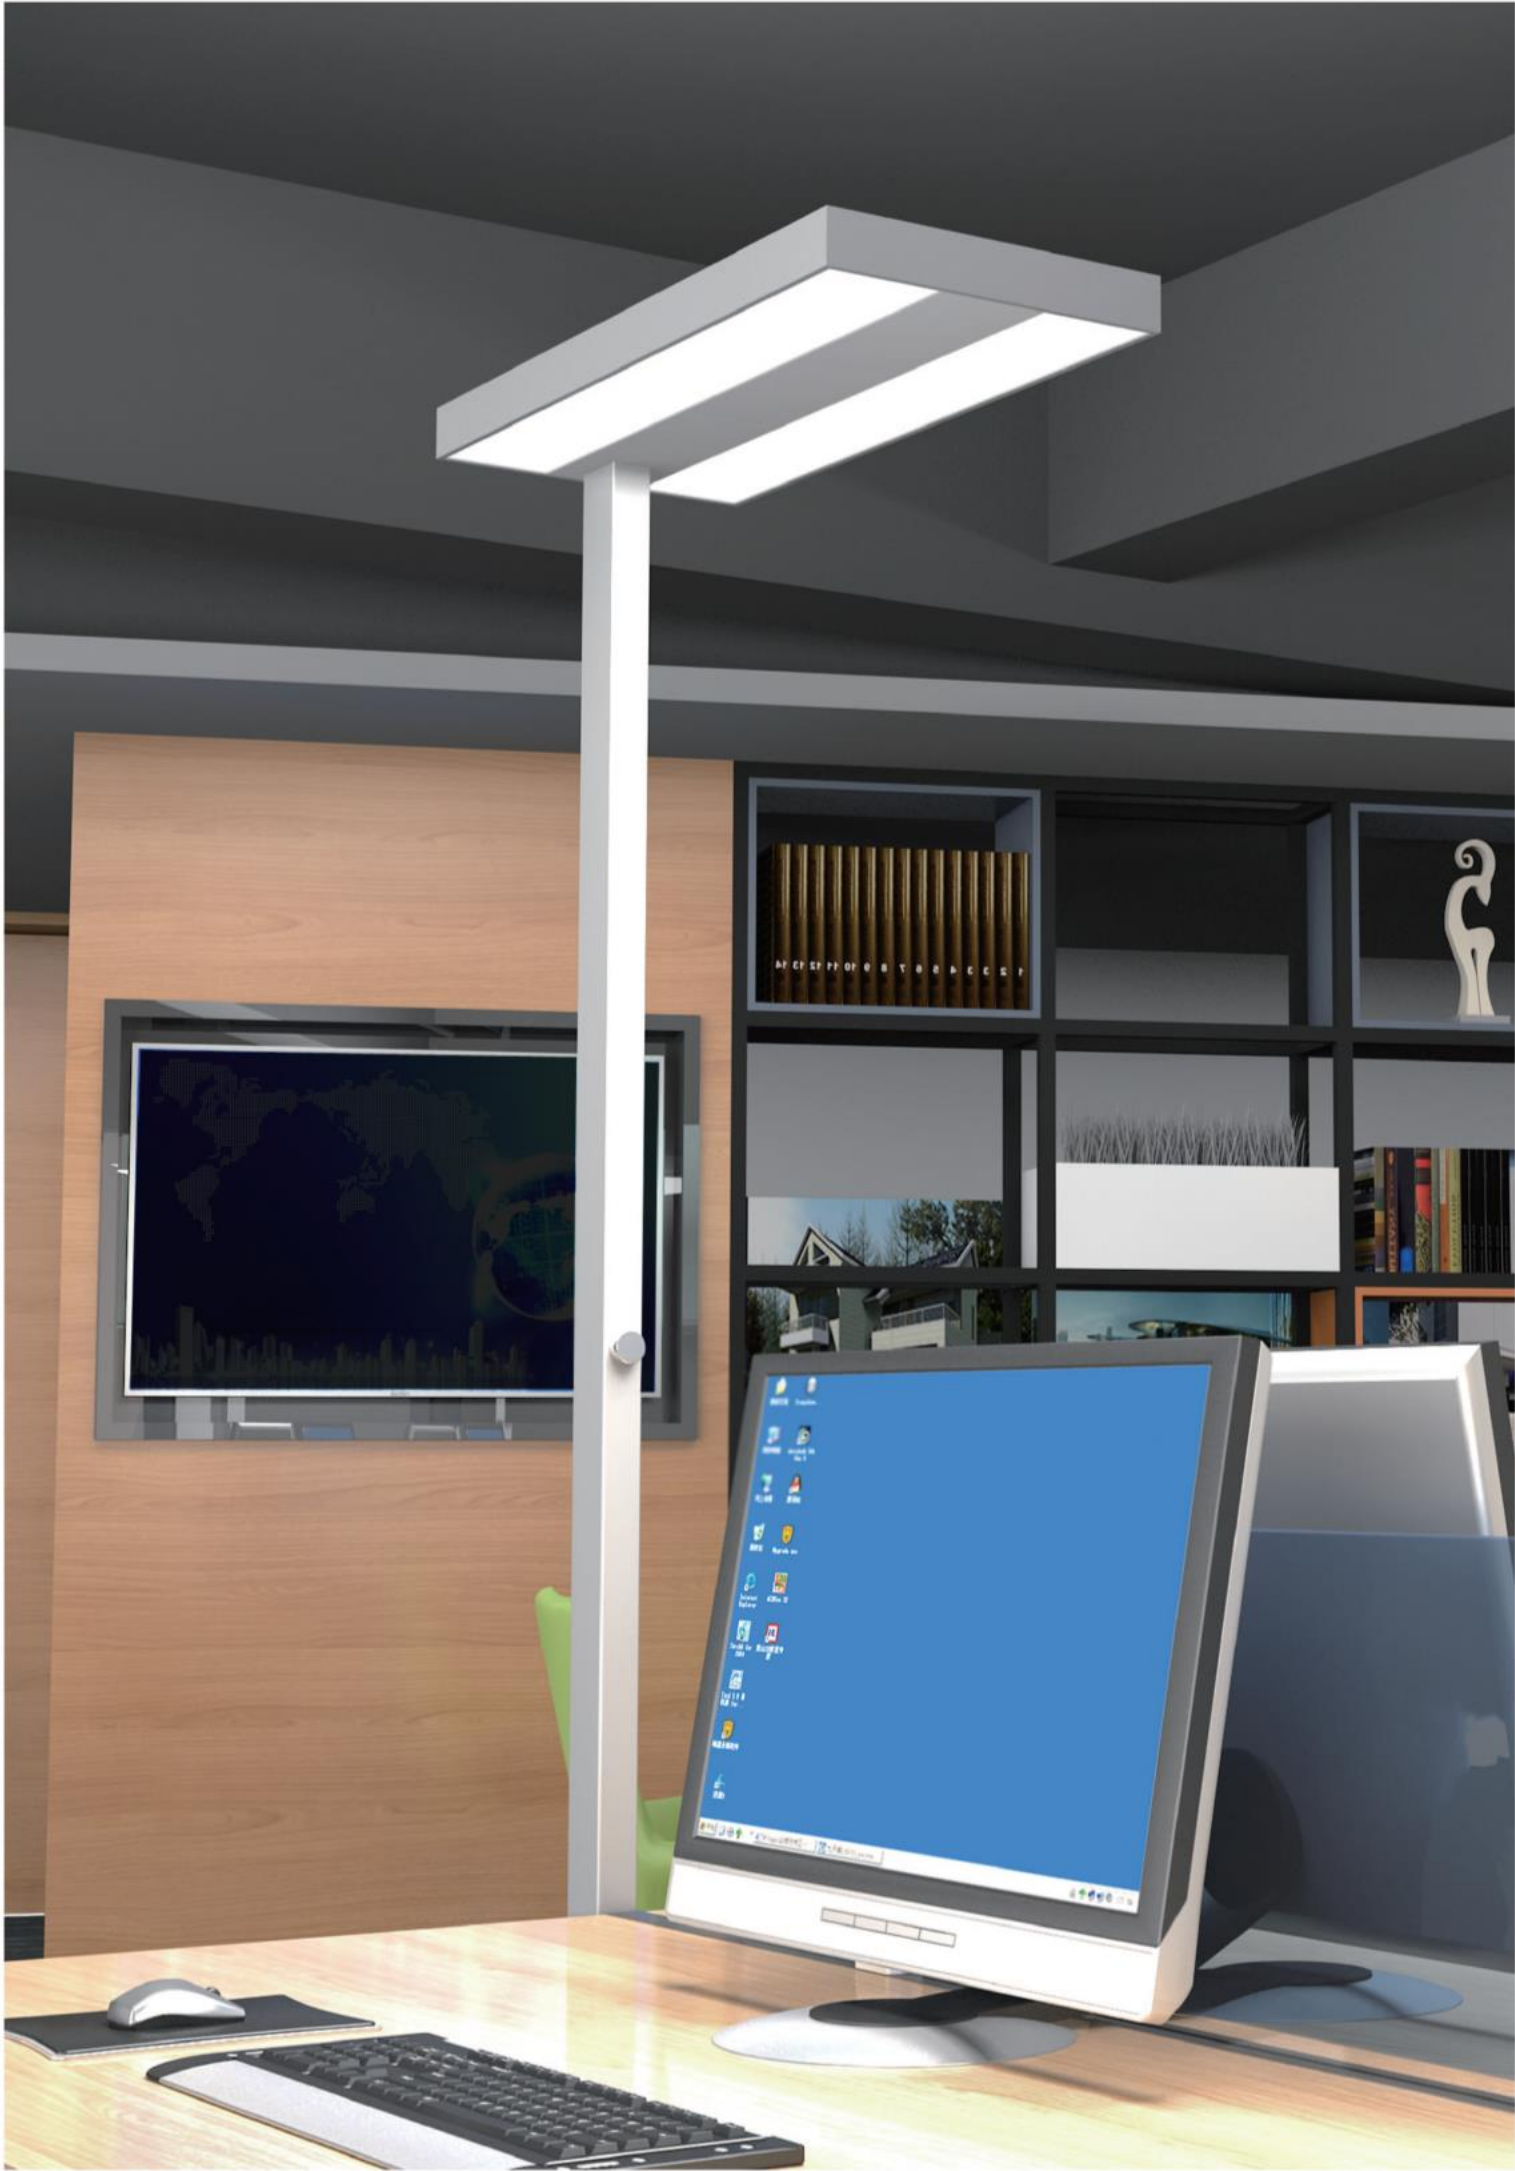

NITED



TECHNICAL DATA



Luminaire Wattage: 160W
Luminous Flux: 19200lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <12
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS


Public offices and other office space.



Part No.	LM	Power	CCT
BNID-2016080-BD	$\uparrow 11500\text{lm} / 7700\text{lm} \downarrow$	$\uparrow 80\text{W} / 80\text{W} \downarrow$	3000/4000/6000K
BNID-2016080-CD	$\uparrow 11000\text{lm} / 7350\text{lm} \downarrow$	$\uparrow 80\text{W} / 80\text{W} \downarrow$	3000-6000K





NITEO

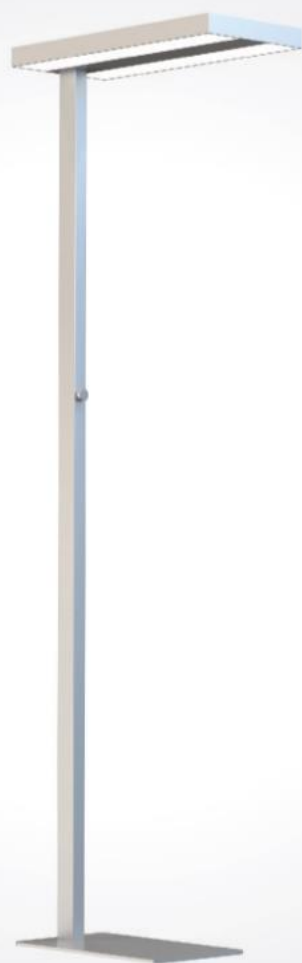

TECHNICAL DATA

Luminaire Wattage: 60W / 80W
Luminous Flux: 6600lm / 8800lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <17
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Knob dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years



COLOURS




APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BNIF-1906030-BN	$\uparrow 3500\text{lm}/3100\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BNIF-1906030-BM	$\uparrow 3500\text{lm}/3100\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BNIF-1906030-BD	$\uparrow 3500\text{lm}/3100\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BNIF-1908040-BN	$\uparrow 4600\text{lm}/4200\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K
BNIF-1908040-BM	$\uparrow 4600\text{lm}/4200\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K
BNIF-1908040-BD	$\uparrow 4600\text{lm}/4200\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K





SUMA

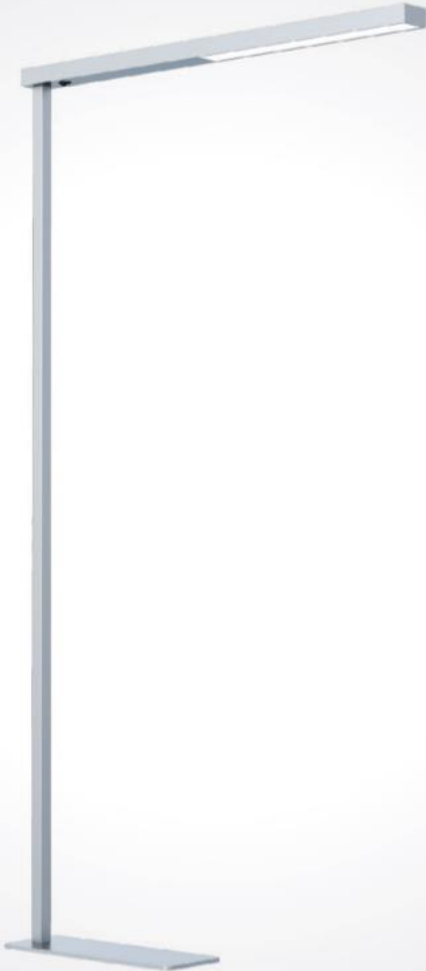

TECHNICAL DATA

Luminaire Wattage: 50W
Luminous Flux: 4500lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <21
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Warranty: 5 years



COLOURS



APPLICATION AREAS


Home office

Part No.	LM	Power	CCT
BSUF-1905025-BN	$\uparrow 2300\text{lm}/2200\text{lm} \downarrow$	$\uparrow 25\text{W}/25\text{W} \downarrow$	3000/4000/6000K





DESK FIXED LUMINAIRES



49 ELFOO-T



51 LENO-T



53 MAYE-TR



55 MAYE-TS



57 HOMET



59 NITET

ELFOO-T



TECHNICAL DATA



Luminaire Wattage: 80W
Luminous Flux: 9600lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 140^\circ / 75^\circ \downarrow$ or $\uparrow 140^\circ / 50^\circ \downarrow$
UGR: <12
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space.



Part No.	LM	Power	CCT
BEFT-1208020-BD	$\uparrow 7200\text{lm}/2400\text{lm} \downarrow$	$\uparrow 60\text{W}/20\text{W} \downarrow$	3000/4000/6000K
BEFT-1208020-CD	$\uparrow 6000\text{lm}/2000\text{lm} \downarrow$	$\uparrow 60\text{W}/20\text{W} \downarrow$	3000-6000K





LENO-T



TECHNICAL DATA

Luminaire Wattage: 80W
Luminous Flux: 9600lm
Correlated Colour Temperature: 3000K/4000K/Tunable White
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 50^\circ \downarrow$
UGR: <6
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years



COLOURS




APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BLET-1208025-BD	$\uparrow 6600\text{lm}/3000\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000/4000/6000K
BLET-1208025-CD	$\uparrow 5500\text{lm}/2500\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000-6000K





MAYE-TR

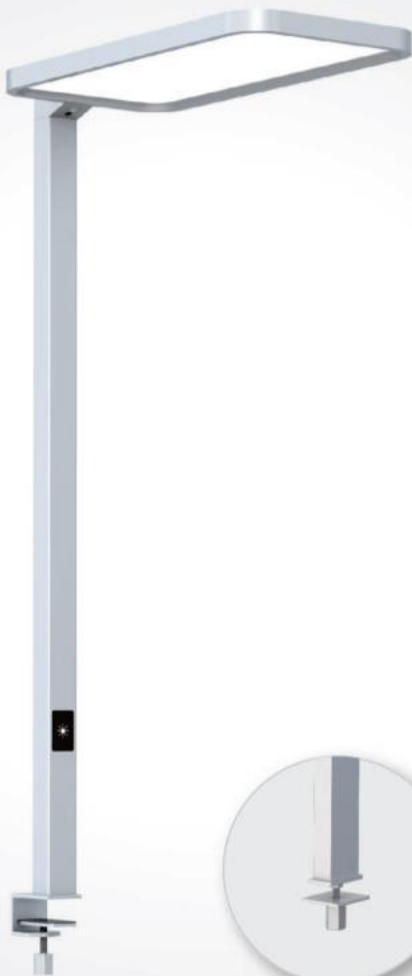

TECHNICAL DATA

Luminaire Wattage: 60W / 80W
Luminous Flux: 6000lm / 8000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years



COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BMRT-1206030-BD	$\uparrow 3000\text{lm}/3000\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BMRT-1206030-BM	$\uparrow 3000\text{lm}/3000\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000/4000/6000K
BMRT-1206030-CD	$\uparrow 2600\text{lm}/2600\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000-6000K
BMRT-1206030-CM	$\uparrow 2600\text{lm}/2600\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	3000-6000K
BMRT-1208040-BD	$\uparrow 4000\text{lm}/4000\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K
BMRT-1208040-BM	$\uparrow 4000\text{lm}/4000\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000/4000/6000K
BMRT-1208040-CD	$\uparrow 3400\text{lm}/3400\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000-6000K
BMRT-1208040-CM	$\uparrow 3400\text{lm}/3400\text{lm} \downarrow$	$\uparrow 40\text{W}/40\text{W} \downarrow$	3000-6000K





MAYE-TS



TECHNICAL DATA

Luminaire Wattage: 60W / 80W
Luminous Flux: 6000lm / 8000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Touch panel dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years



COLOURS



APPLICATION AREAS

Personal offices, public offices and other office space.

Part No.	LM	Power	CCT
BMST-1206030-BD	13000lm/3000lm ↓	130W/30W ↓	3000/4000/6000K
BMST-1206030-BM	13000lm/3000lm ↓	130W/30W ↓	3000/4000/6000K
BMST-1206030-CD	12600lm/2600lm ↓	130W/30W ↓	3000-6000K
BMST-1206030-CM	12600lm/2600lm ↓	130W/30W ↓	3000-6000K
BMST-1208040-BD	14000lm/4000lm ↓	140W/40W ↓	3000/4000/6000K
BMST-1208040-BM	14000lm/4000lm ↓	140W/40W ↓	3000/4000/6000K
BMST-1208040-CD	13400lm/3400lm ↓	140W/40W ↓	3000-6000K
BMST-1208040-CM	13400lm/3400lm ↓	140W/40W ↓	3000-6000K



HOMET



TECHNICAL DATA



Luminaire Wattage: 60W / 80W
Luminous Flux: 6600lm / 8800lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Knob dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS



APPLICATION AREAS


Personal offices, public offices and other office space.



Part No.	LM	Power	CCT
BHOT-1206030-BN	13500lm/3100lm ↓	130W/30W ↓	3000/4000/6000K
BHOT-1206030-BM	13500lm/3100lm ↓	130W/30W ↓	3000/4000/6000K
BHOT-1206030-BD	13500lm/3100lm ↓	130W/30W ↓	3000/4000/6000K
BHOT-1208040-BN	14600lm/4200lm ↓	140W/40W ↓	3000/4000/6000K
BHOT-1208040-BM	14600lm/4200lm ↓	140W/40W ↓	3000/4000/6000K
BHOT-1208040-BD	14600lm/4200lm ↓	140W/40W ↓	3000/4000/6000K



NITET

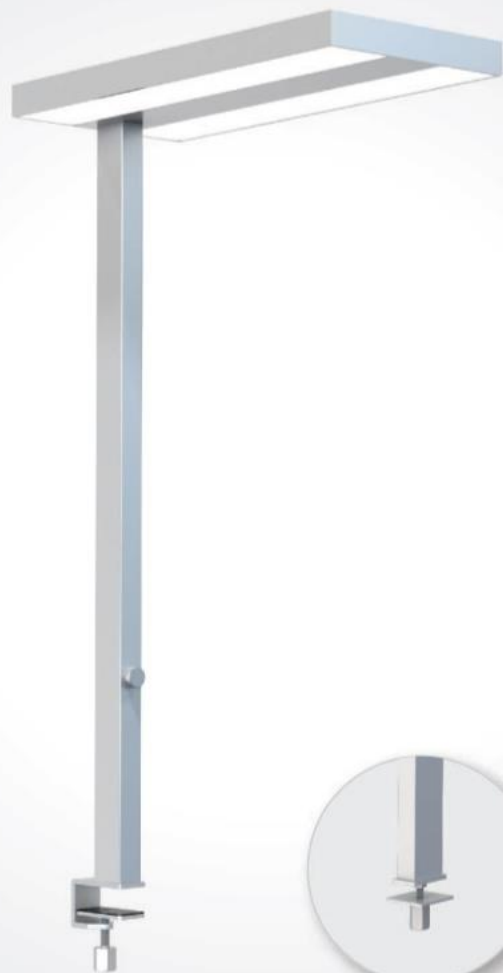

TECHNICAL DATA



Luminaire Wattage: 60W / 80W
Luminous Flux: 6600lm / 8800lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: Knob dimming
Sensor: Daylight sensor and Motion sensor
Warranty: 5 years

COLOURS




APPLICATION AREAS

Personal offices, public offices and other office space.



Part No.	LM	Power	CCT
BNIT-1206030-BN	13500lm/3100lm	130W/30W	3000/4000/6000K
BNIT-1206030-BM	13500lm/3100lm	130W/30W	3000/4000/6000K
BNIT-1206030-BD	13500lm/3100lm	130W/30W	3000/4000/6000K
BNIT-1208040-BN	14600lm/4200lm	140W/40W	3000/4000/6000K
BNIT-1208040-BM	14600lm/4200lm	140W/40W	3000/4000/6000K
BNIT-1208040-BD	14600lm/4200lm	140W/40W	3000/4000/6000K



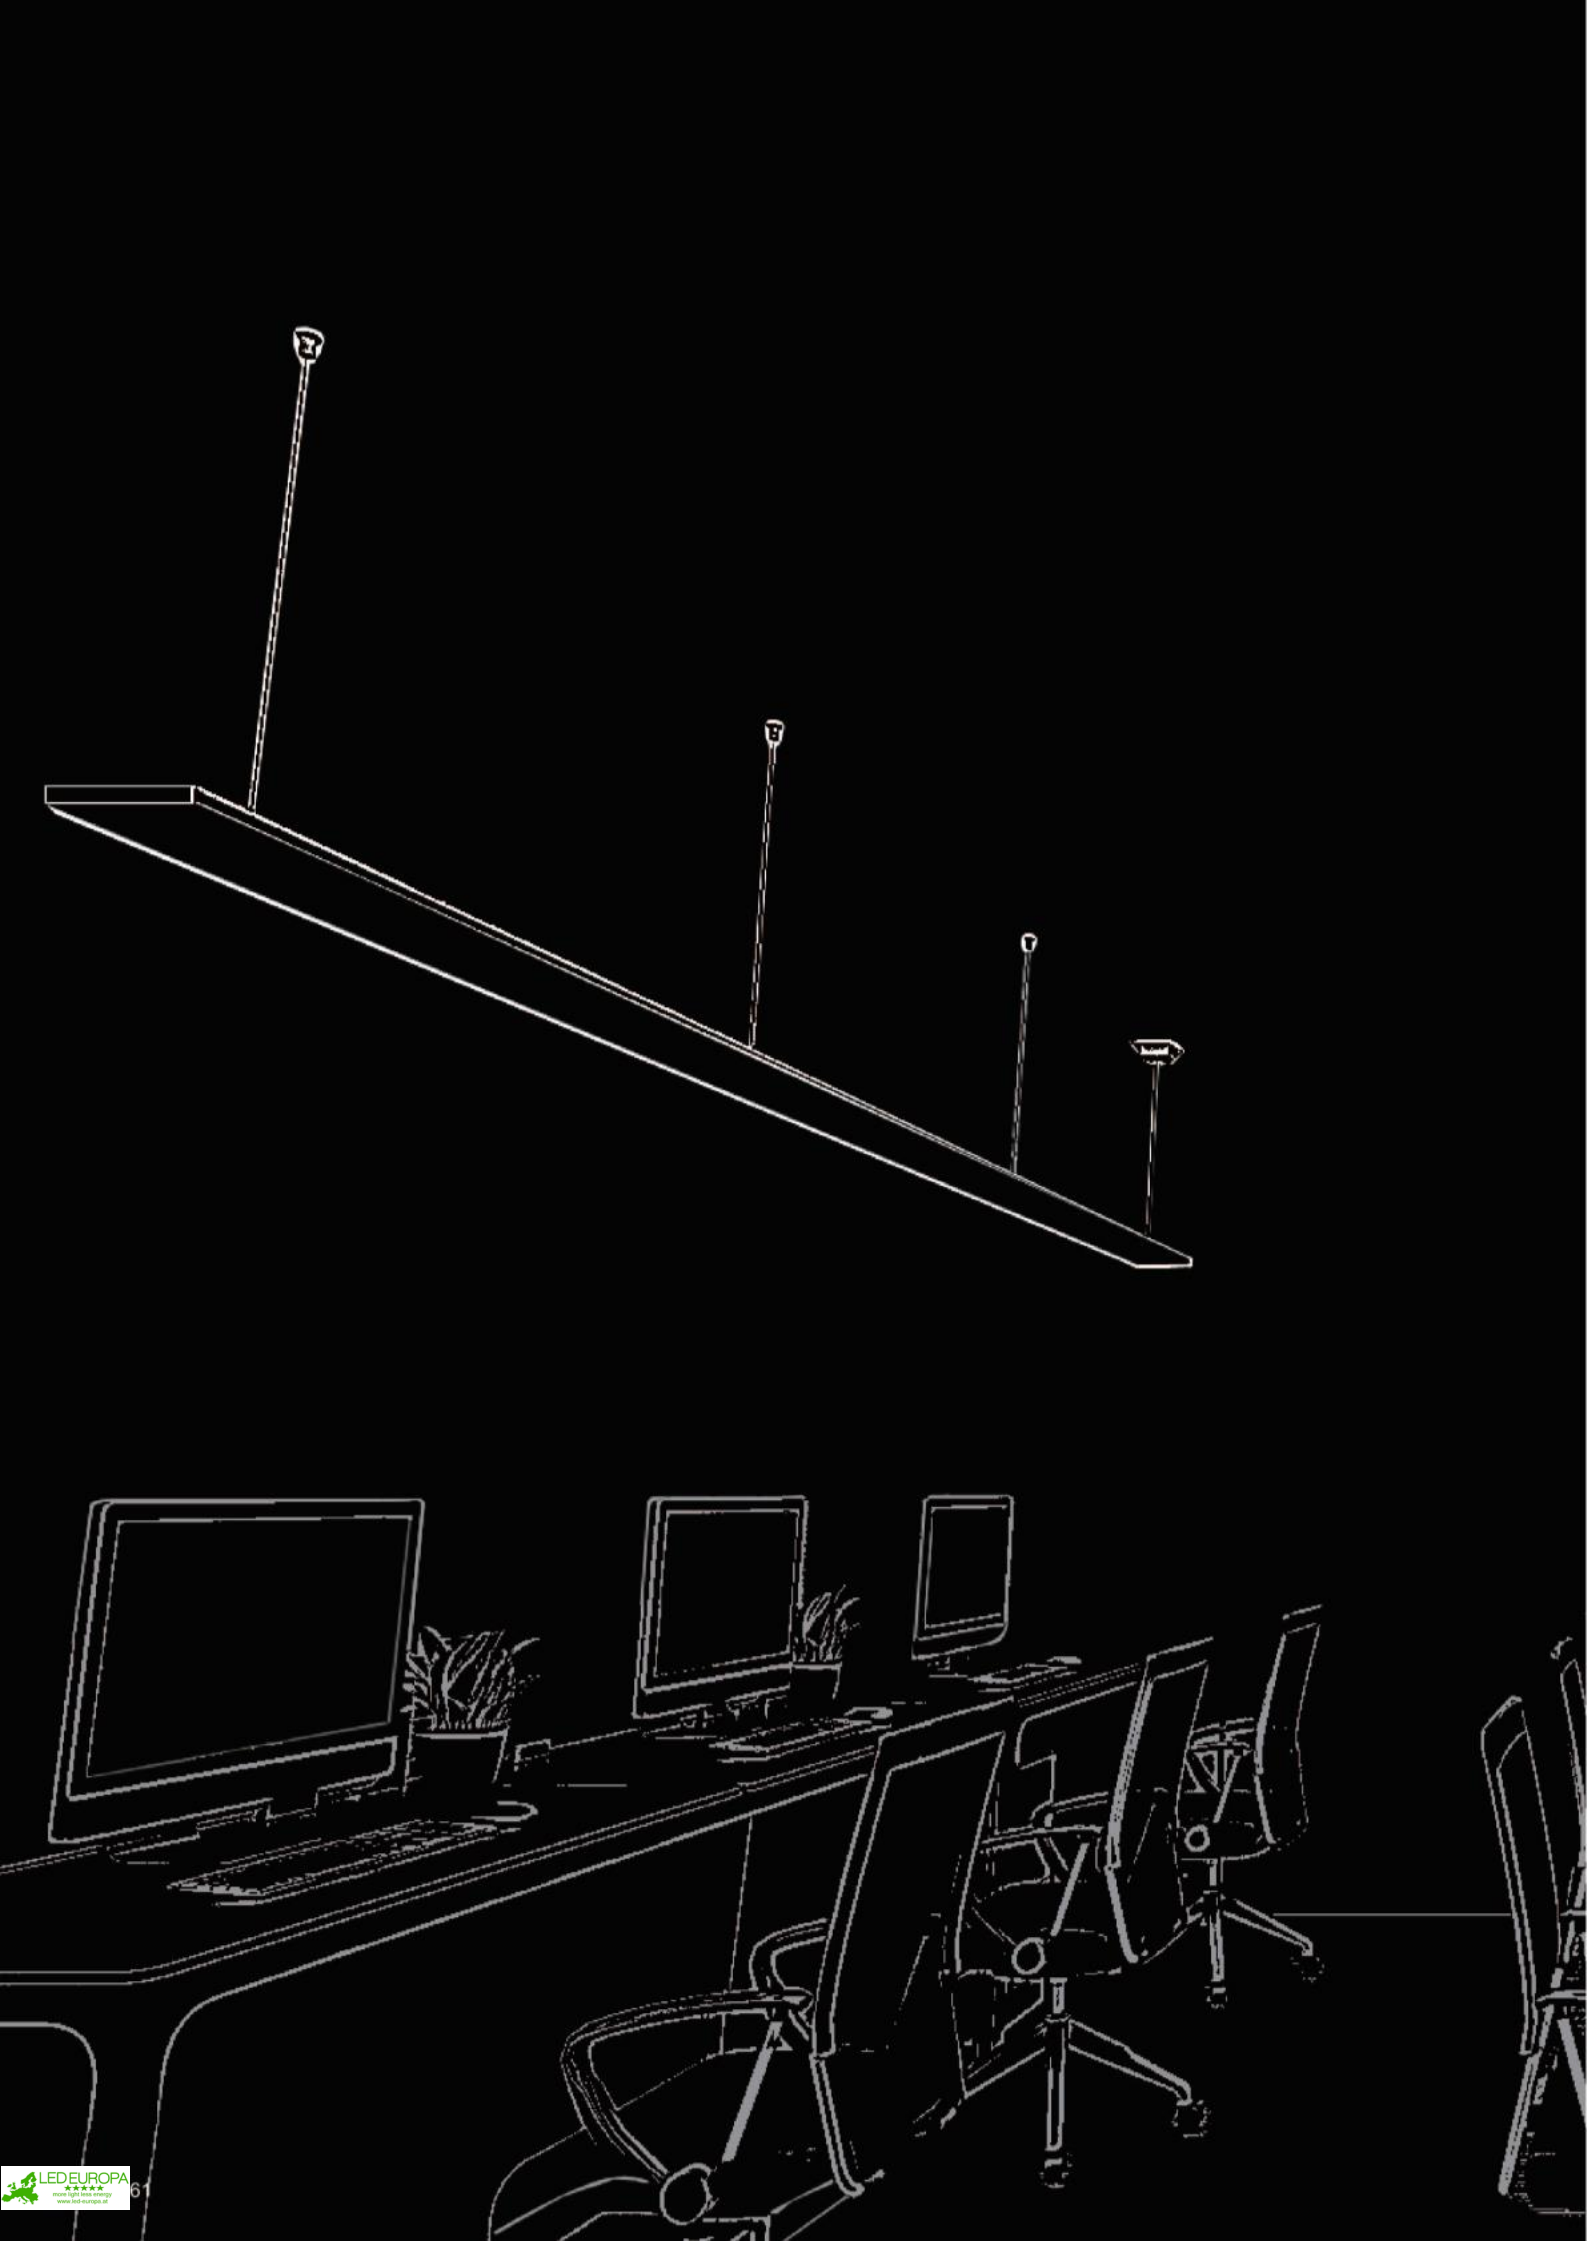

PENDANT LUMINAIRES




63 NIO



65 FREE-P



67 PILO



69 PECO



71 KISS-P




73 ROMI-P



75 SAMI-P



77 ELFOO-P



79 LENO-P0



81 LENO-P1



83 LENO-P2



85 MAYE-PR




87 MAYE-PS




89 LICON-P

NIO

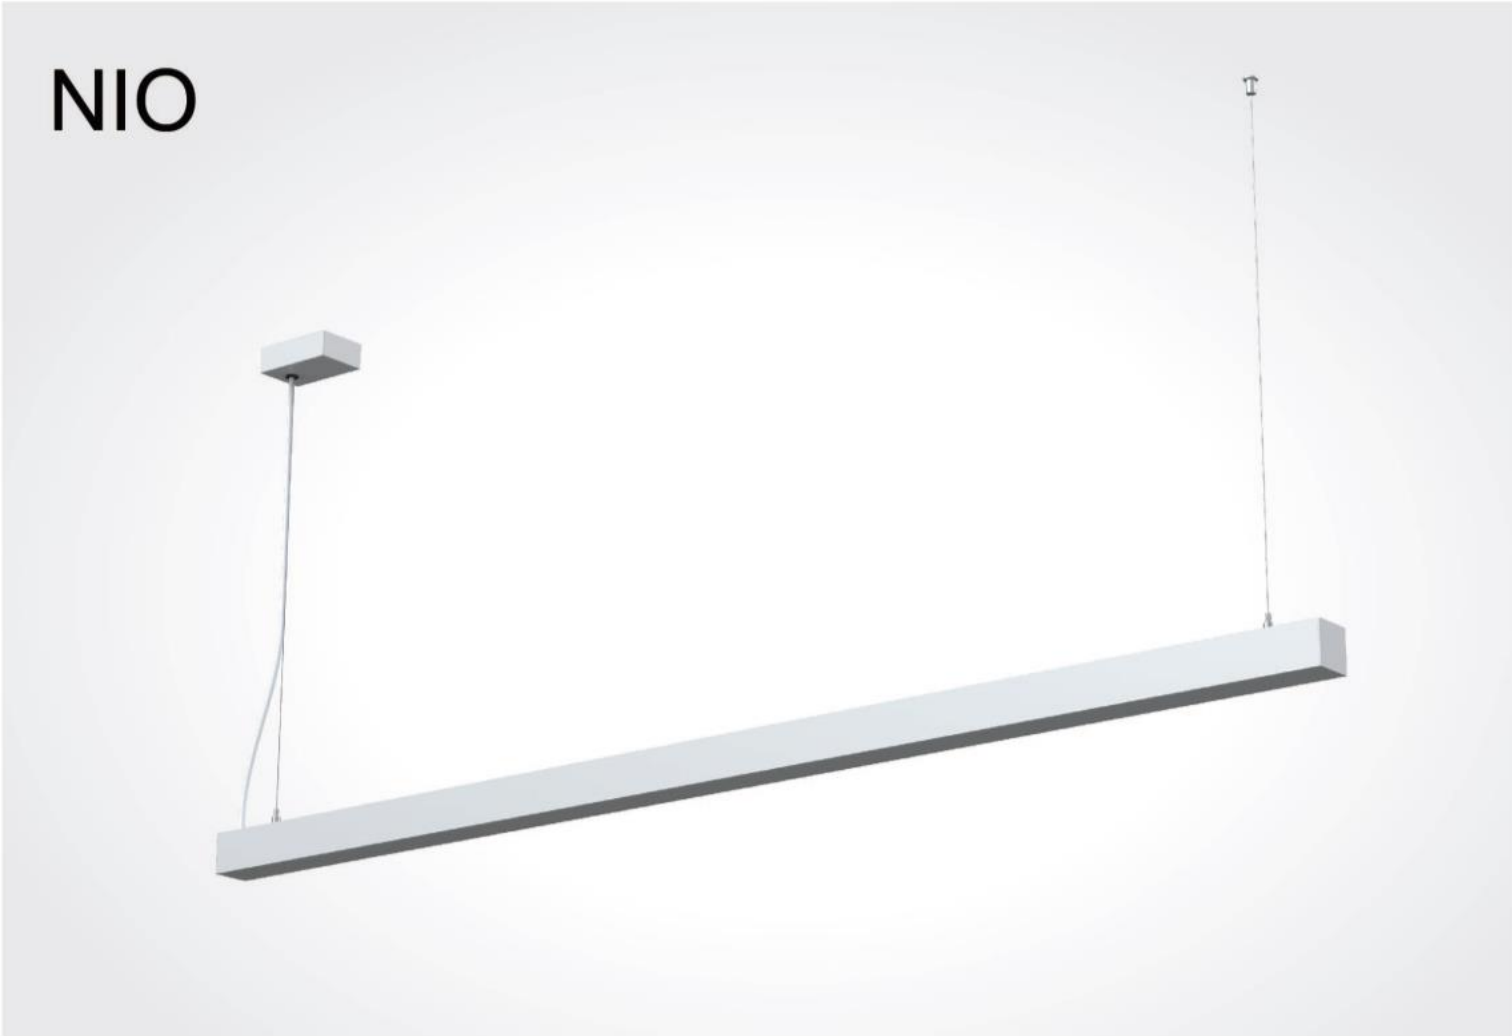

TECHNICAL DATA

Luminaire Wattage: 70W
Luminous Flux: 10150 lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 120°
UGR: <6
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

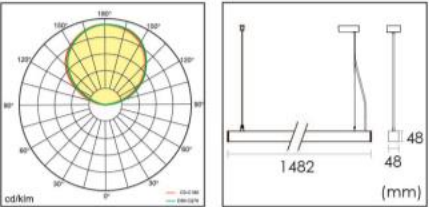

Part No.	LM	Power	Dimming
BNIP-1507000-NN	† 10150 lm	70W	On/off
BNIP-1507000-VN	† 10150 lm	70W	1-10V dimming
BNIP-1507000-DN	† 10150 lm	70W	Dali dimming

COLOURS

Silver White Black

APPLICATION AREAS

For open plan office, training room, conference room and other office space.



FREE-P



TECHNICAL DATA


Luminaire Wattage: 50W / 60W
Luminous Flux: 6000lm / 7200lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 100^\circ / 95^\circ \downarrow$
UGR: <17
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS


Open plan office, training room, conference room and other office space.

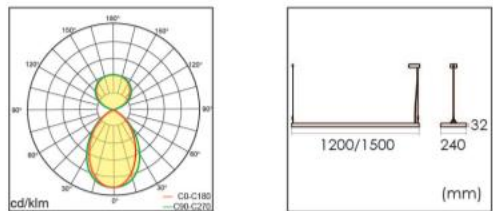

Part No.	LM	Power	Dimming
BFEP-1205025-NN	$\uparrow 2100\text{lm}/3900\text{lm} \downarrow$	$\uparrow 15\text{W}/35\text{W} \downarrow$	On/off
BFEP-1205025-VN	$\uparrow 2100\text{lm}/3900\text{lm} \downarrow$	$\uparrow 15\text{W}/35\text{W} \downarrow$	1-10V dimming
BFEP-1205025-DN	$\uparrow 2100\text{lm}/3900\text{lm} \downarrow$	$\uparrow 15\text{W}/35\text{W} \downarrow$	Dali dimming
BFEP-1506030-NN	$\uparrow 2800\text{lm}/4400\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	On/off
BFEP-1506030-VN	$\uparrow 2800\text{lm}/4400\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	1-10V dimming
BFEP-1506030-DN	$\uparrow 2800\text{lm}/4400\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	Dali dimming





PILO

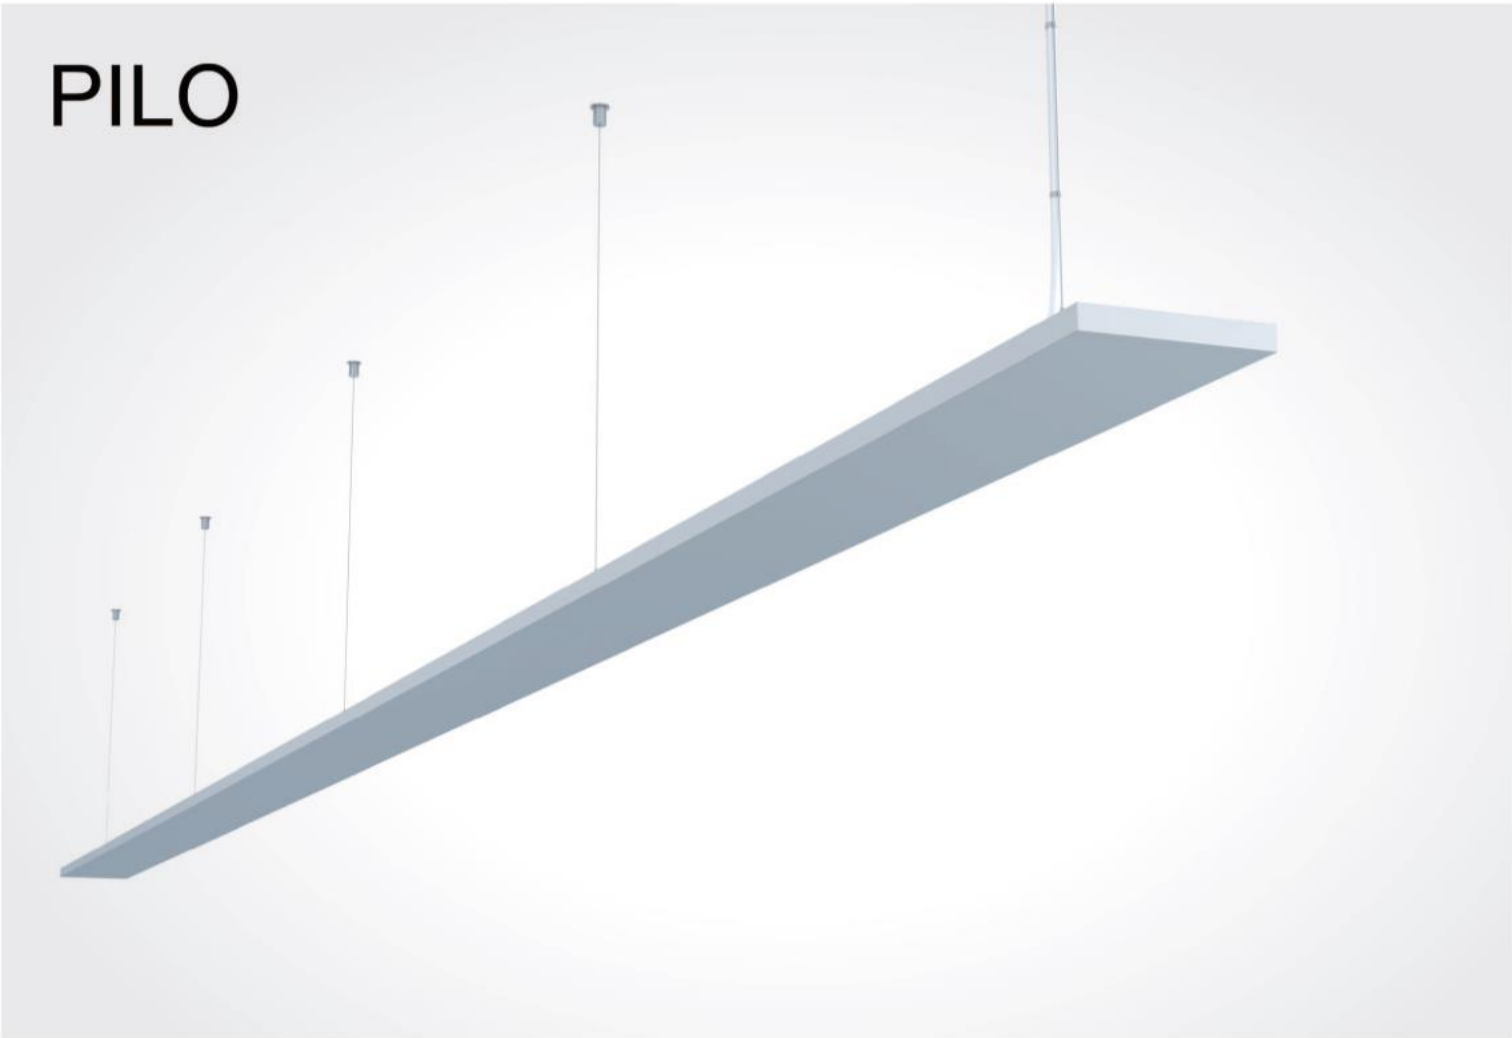

TECHNICAL DATA

Luminaire Wattage: 60W / 80W
Luminous Flux: 7200lm / 9600lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 140°
UGR: <6
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open plan office, training room, conference room and other office space.

Part No.	LM	Power	Dimming
BPIP-1206000-NN	7200lm	60W	On/off
BPIP-1206000-VN	7200lm	60W	1-10V dimming
BPIP-1508000-NN	9600lm	80W	On/off
BPIP-1508000-VN	9600lm	80W	1-10V dimming





PECO

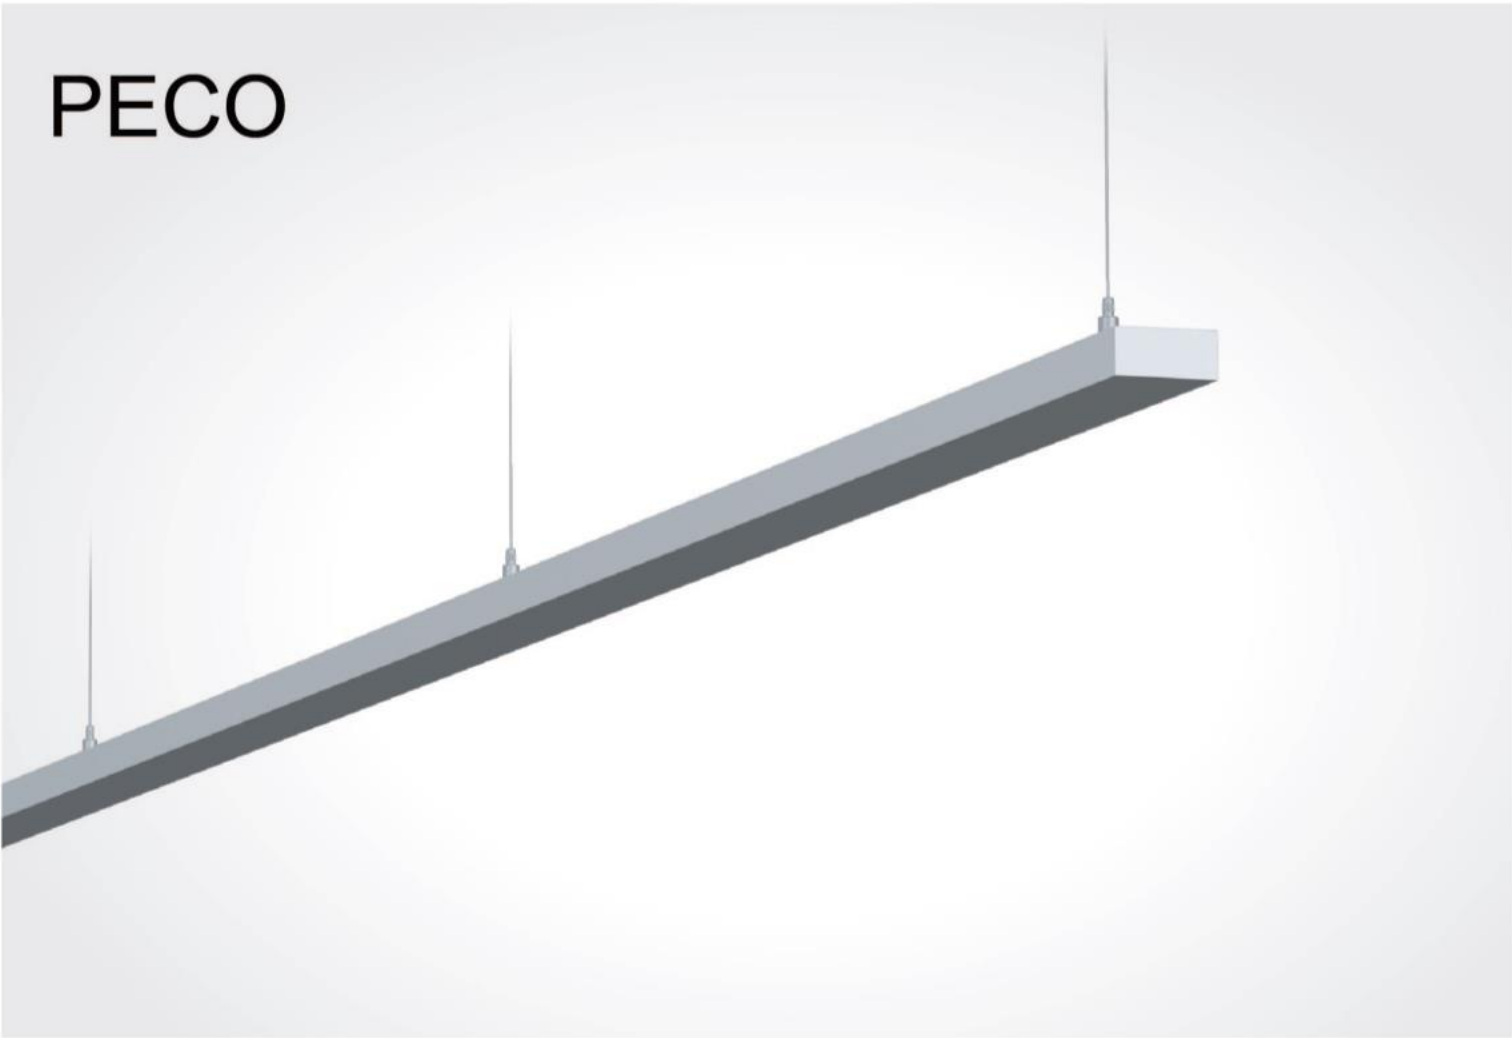

TECHNICAL DATA

Luminaire Wattage: 10W
Luminous Flux: 1000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 160°
UGR: <6
Protection Rating: IP20
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Corridors

Part No.	LM	Power	Dimming
BPEP-1201000-NN	1000lm	10W	On/off
BPEP-1201000-NM	1000lm	10W	On/off





KISS-P

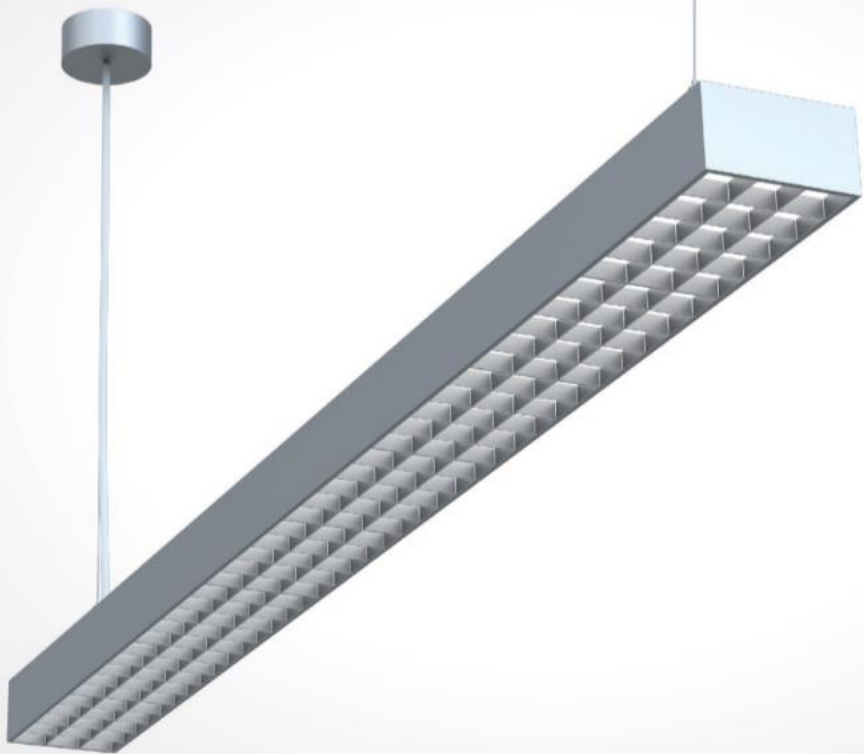

TECHNICAL DATA

Luminaire Wattage: 60W
Luminous Flux: 5700lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 85^\circ \downarrow$
UGR: <16
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS



APPLICATION AREAS

Cell office, open plan office, meeting room and other office space.

Part No.	LM	Power	Dimming
BKIP-1206030-NN	$\uparrow 3000\text{lm}/2700\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	On/off
BKIP-1206030-VN	$\uparrow 3000\text{lm}/2700\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	1-10V dimming
BKIP-1206030-DN	$\uparrow 3000\text{lm}/2700\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	Dali dimming





ROMI-P



TECHNICAL DATA

Luminaire Wattage: 18W / 30W / 48W / 80W
Luminous Flux: 1700lm / 3100lm / 5250lm / 9000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 100^\circ / 95^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open-plan office, Individual ofcce, Cafeteria,Corridors,Break-out area, Classroom ,etc.

Part No.	LM	Power	Dimming
BROP-3501812-NN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	On/off
BROP-3501812-VN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	1-10V dimming
BROP-3501812-DN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	Dali dimming
BROP-4503021-NN	↑ 1000lm/2100lm ↓	↑ 9W/21W ↓	On/off
BROP-4503021-VN	↑ 1000lm/2100lm ↓	↑ 9W/21W ↓	1-10V dimming
BROP-4503021-DN	↑ 1000lm/2100lm ↓	↑ 9W/21W ↓	Dali dimming
BROP-6004834-NN	↑ 1750lm/3500lm ↓	↑ 14W/34W ↓	On/off
BROP-6004834-VN	↑ 1750lm/3500lm ↓	↑ 14W/34W ↓	1-10V dimming
BROP-6004834-DN	↑ 1750lm/3500lm ↓	↑ 14W/34W ↓	Dali dimming
BROP-9008056-NN	↑ 3400lm/5600lm ↓	↑ 24W/56W ↓	On/off
BROP-9008056-VN	↑ 3400lm/5600lm ↓	↑ 24W/56W ↓	1-10V dimming
BROP-9008056-DN	↑ 3400lm/5600lm ↓	↑ 24W/56W ↓	Dali dimming



SAMI-P

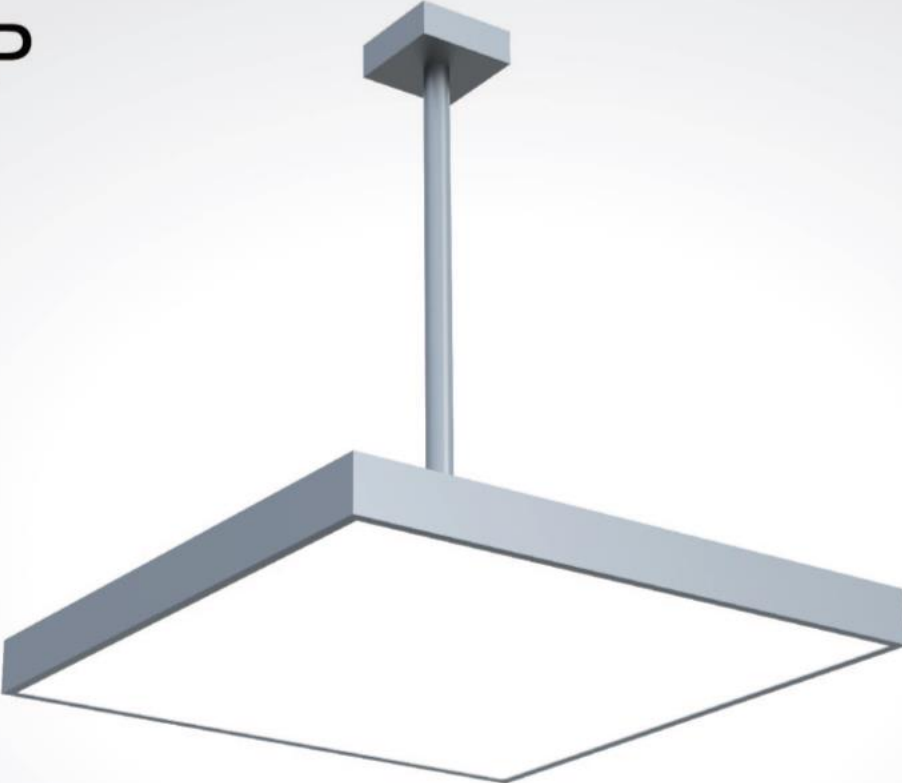

TECHNICAL DATA



Luminaire Wattage: 30W
Luminous Flux: 3100lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 100^\circ / 95^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS

Open-plan office, Individual office, Cafeteria, Corridors, Break-out area, Classroom, etc.



Part No.	LM	Power	Dimming
BSAP-4503021-NN	$\uparrow 1000\text{lm} / 2100\text{lm} \downarrow$	$\uparrow 9\text{W} / 21\text{W} \downarrow$	On/off
BSAP-4503021-VN	$\uparrow 1000\text{lm} / 2100\text{lm} \downarrow$	$\uparrow 9\text{W} / 21\text{W} \downarrow$	1-10V dimming
BSAP-4503021-DN	$\uparrow 1000\text{lm} / 2100\text{lm} \downarrow$	$\uparrow 9\text{W} / 21\text{W} \downarrow$	Dali dimming



ELFOO-P



TECHNICAL DATA



Luminaire Wattage: 60W / 70W
Luminous Flux: 7450lm / 9100lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 140^\circ / 75^\circ \downarrow$ or $\uparrow 140^\circ / 50^\circ \downarrow$
UGR: <15
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS


Open-plan office, Individual office, Cafeteria, Training room, Classroom, etc.



Part No.	LM	Power	Dimming
BEFP-1206024-NN	$\uparrow 4200\text{lm}/3250\text{lm} \downarrow$	$\uparrow 36\text{W}/24\text{W} \downarrow$	On/off
BEFP-1206024-VN	$\uparrow 4200\text{lm}/3250\text{lm} \downarrow$	$\uparrow 36\text{W}/24\text{W} \downarrow$	1-10V dimming
BEFP-1206024-DN	$\uparrow 4200\text{lm}/3250\text{lm} \downarrow$	$\uparrow 36\text{W}/24\text{W} \downarrow$	Dali dimming
BEFP-1507028-NN	$\uparrow 5050\text{lm}/4050\text{lm} \downarrow$	$\uparrow 42\text{W}/28\text{W} \downarrow$	On/off
BEFP-1507028-VN	$\uparrow 5050\text{lm}/4050\text{lm} \downarrow$	$\uparrow 42\text{W}/28\text{W} \downarrow$	1-10V dimming
BEFP-1507028-DN	$\uparrow 5050\text{lm}/4050\text{lm} \downarrow$	$\uparrow 42\text{W}/28\text{W} \downarrow$	Dali dimming





LENO-P0

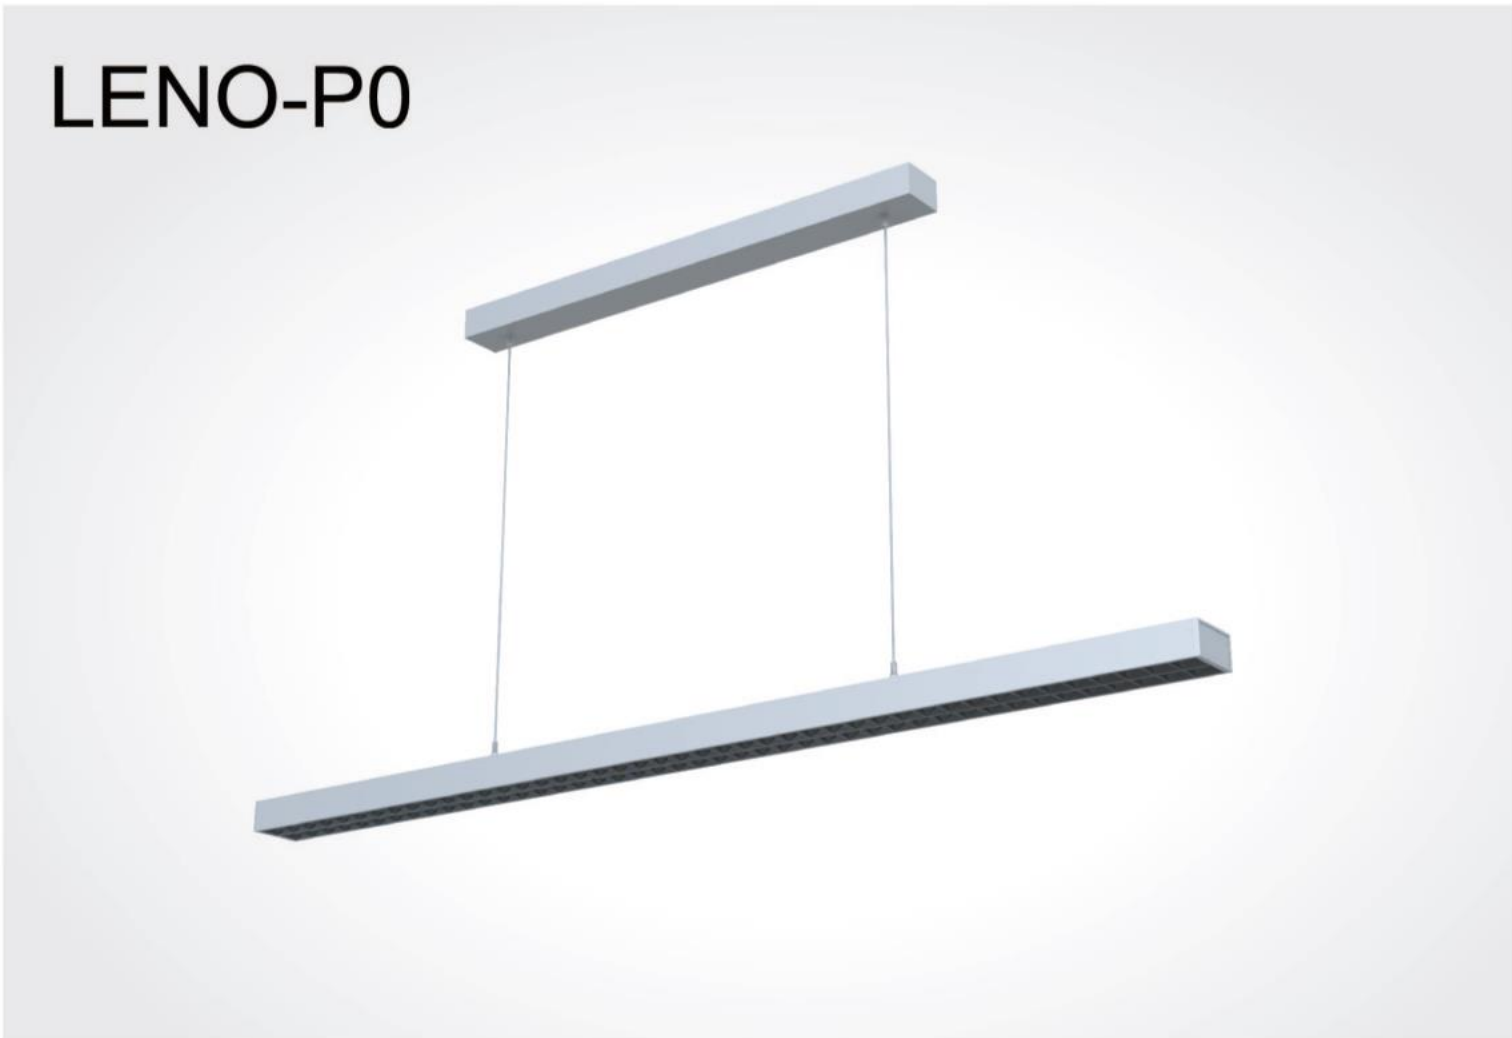

TECHNICAL DATA

Luminaire Wattage: 60W / 70W
Luminous Flux: 6400lm / 7600lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 115^\circ / 50^\circ \downarrow$
UGR: <6
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open-plan office, Individual office, small meeting room, reception, etc.

Part No.	LM	Power	Dimming
BLEP0-1206030-NN	13200lm/3200lm ↓	130W/30W ↓	On/off
BLEP0-1206030-VN	13200lm/3200lm ↓	130W/30W ↓	1-10V dimming
BLEP0-1206030-DN	13200lm/3200lm ↓	130W/30W ↓	Dali dimming
BLEP0-1507035-NN	13800lm/3800lm ↓	135W/35W ↓	On/off
BLEP0-1507035-VN	13800lm/3800lm ↓	135W/35W ↓	1-10V dimming
BLEP0-1507035-DN	13800lm/3800lm ↓	135W/35W ↓	Dali dimming





LENO-P1

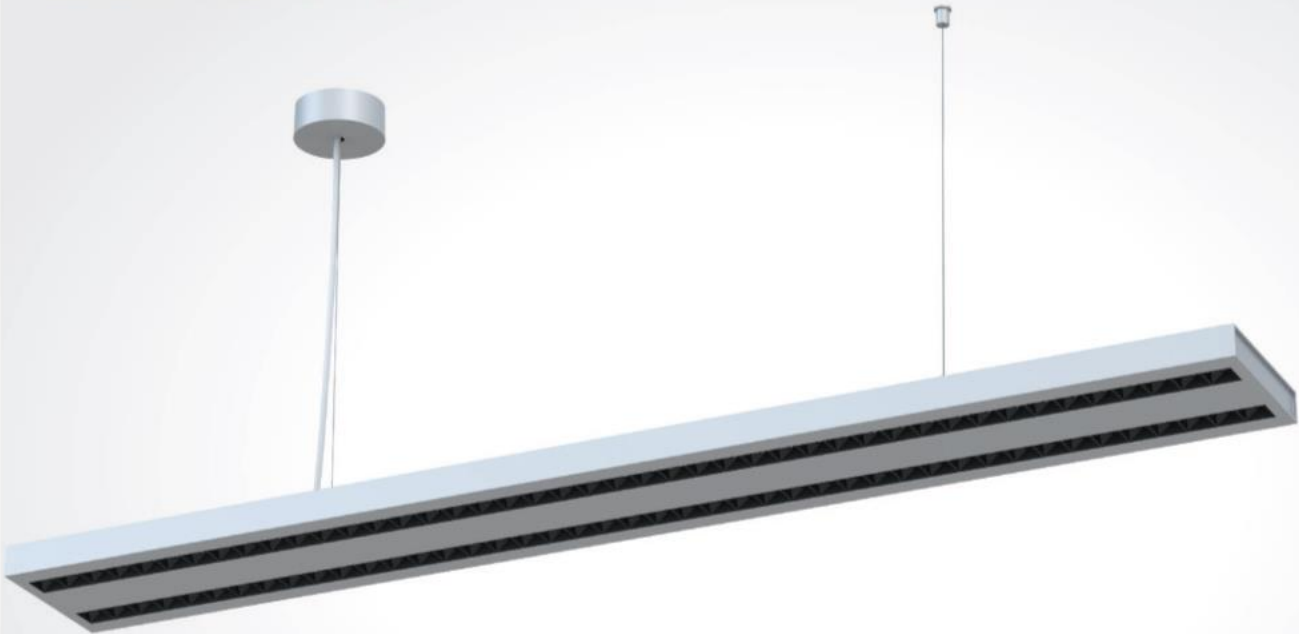

TECHNICAL DATA

Luminaire Wattage: 60W / 70W
Luminous Flux: 6700lm / 7750lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 115^\circ / 50^\circ \downarrow$
UGR: <6
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open-plan office, Individual office, small meeting room, reception, etc.

Part No.	LM	Power	Dimming
BLEP1-1206030-NN	$\uparrow 3400\text{lm}/3300\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	On/off
BLEP1-1206030-VN	$\uparrow 3400\text{lm}/3300\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	1-10V dimming
BLEP1-1206030-DN	$\uparrow 3400\text{lm}/3300\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	Dali dimming
BLEP1-1507035-NN	$\uparrow 3950\text{lm}/3800\text{lm} \downarrow$	$\uparrow 35\text{W}/35\text{W} \downarrow$	On/off
BLEP1-1507035-VN	$\uparrow 3950\text{lm}/3800\text{lm} \downarrow$	$\uparrow 35\text{W}/35\text{W} \downarrow$	1-10V dimming
BLEP1-1507035-DN	$\uparrow 3950\text{lm}/3800\text{lm} \downarrow$	$\uparrow 35\text{W}/35\text{W} \downarrow$	Dali dimming





LENO-P2

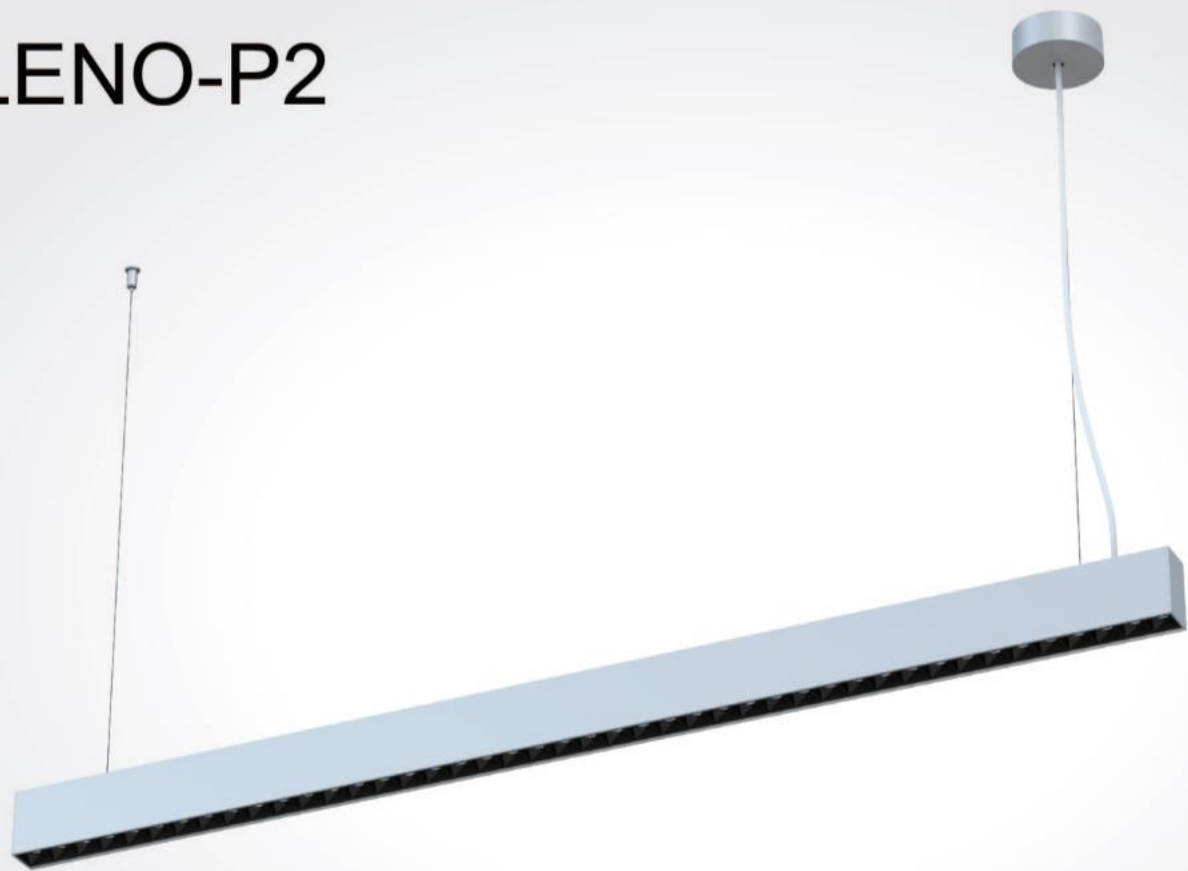

TECHNICAL DATA

Luminaire Wattage: 50W / 60W
Luminous Flux: 5500lm / 6600lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 115^\circ / 50^\circ \downarrow$
UGR: <6
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS



APPLICATION AREAS

Open-plan office, Individual office, small meeting room, reception, etc.

Part No.	LM	Power	Dimming
BLEP2-1205025-NN	$\uparrow 2950\text{lm}/2550\text{lm} \downarrow$	$\uparrow 25\text{W}/25\text{W} \downarrow$	On/off
BLEP2-1205025-VN	$\uparrow 2950\text{lm}/2550\text{lm} \downarrow$	$\uparrow 25\text{W}/25\text{W} \downarrow$	1-10V dimming
BLEP2-1205025-DN	$\uparrow 2950\text{lm}/2550\text{lm} \downarrow$	$\uparrow 25\text{W}/25\text{W} \downarrow$	Dali dimming
BLEP2-1506030-NN	$\uparrow 3550\text{lm}/3050\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	On/off
BLEP2-1506030-VN	$\uparrow 3550\text{lm}/3050\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	1-10V dimming
BLEP2-1506030-DN	$\uparrow 3550\text{lm}/3050\text{lm} \downarrow$	$\uparrow 30\text{W}/30\text{W} \downarrow$	Dali dimming



MAYE-PR



TECHNICAL DATA

Luminaire Wattage: 60W
Luminous Flux: 6000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years


COLOURS

Silver White Black

APPLICATION AREAS

Open-plan office, Individual office, meeting room, Guest room , etc.

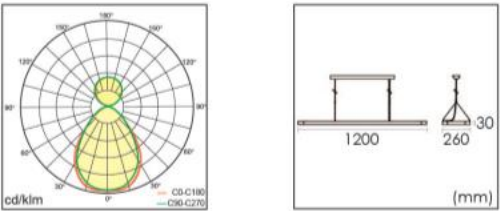

Part No.	LM	Power	Dimming
BMRP-1206040-NN	$\uparrow 2000\text{lm}/4000\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	On/off
BMRP-1206040-VN	$\uparrow 2000\text{lm}/4000\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	1-10V dimming
BMRP-1206040-DN	$\uparrow 2000\text{lm}/4000\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	Dali dimming





MAYE-PS



TECHNICAL DATA

Luminaire Wattage: 60W
Luminous Flux: 6000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open-plan office, Individual office, meeting room, Guest room , etc.

Part No.	LM	Power	Dimming
BMSP-1206040-NN	$\uparrow 2000\text{lm}/4000\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	On/off
BMSP-1206040-VN	$\uparrow 2000\text{lm}/4000\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	1-10V dimming
BMSP-1206040-DN	$\uparrow 2000\text{lm}/4000\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	Dali dimming



LICON-P

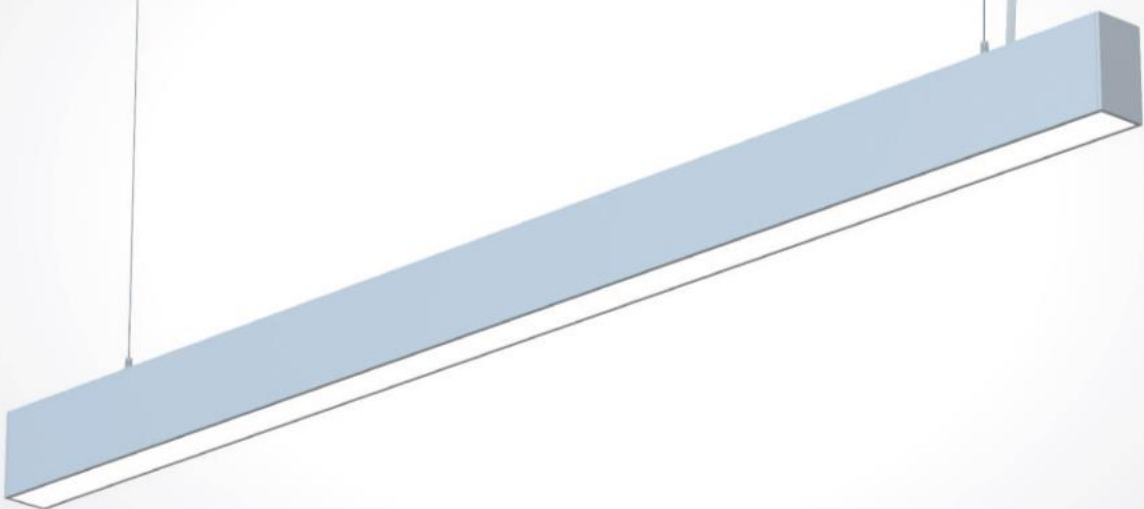

TECHNICAL DATA


Luminaire Wattage: 40W / 48W / 50W / 60W
Luminous Flux: 3600lm / 5300lm / 4500lm / 6600lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 80^\circ \downarrow$
UGR: <21
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS

Open-plan office, Individual office, meeting room, Guest room , etc.

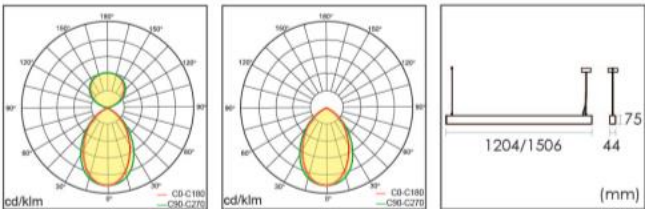

Part No.	LM	Power	Dimming
BLIP-1205035-NN	$\uparrow 1800\text{lm}/3500\text{lm} \downarrow$	$\uparrow 16\text{W}/32\text{W} \downarrow$	On/off
BLIP-1205035-VN	$\uparrow 1800\text{lm}/3500\text{lm} \downarrow$	$\uparrow 16\text{W}/32\text{W} \downarrow$	1-10V dimming
BLIP-1205035-DN	$\uparrow 1800\text{lm}/3500\text{lm} \downarrow$	$\uparrow 16\text{W}/32\text{W} \downarrow$	Dali dimming
BLIP-1506042-NN	$\uparrow 2200\text{lm}/4400\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	On/off
BLIP-1506042-VN	$\uparrow 2200\text{lm}/4400\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	1-10V dimming
BLIP-1506042-DN	$\uparrow 2200\text{lm}/4400\text{lm} \downarrow$	$\uparrow 20\text{W}/40\text{W} \downarrow$	Dali dimming
BLIP-1204040-NN	3600lm	40W	On/off
BLIP-1204040-VN	3600lm	40W	1-10V dimming
BLIP-1204040-DN	3600lm	40W	Dali dimming
BLIP-1505050-NN	4500lm	50W	On/off
BLIP-1505050-VN	4500lm	50W	1-10V dimming
BLIP-1505050-DN	4500lm	50W	Dali dimming





SURFACE MOUNTED LUMINAIRES



93 FREE-C



95 WASE-C



97 KISS-C



99 ROMI-C



101 SAMI-C



103 ELFOO-C



105 ELFOO-C3



107 LICON-C



109 LENO-C1



111 LENO-C2



113 MAYE-CR0



115 MAYE-CR1




117 MAYE-CS0





119 MAYE-CS1

FREE-C

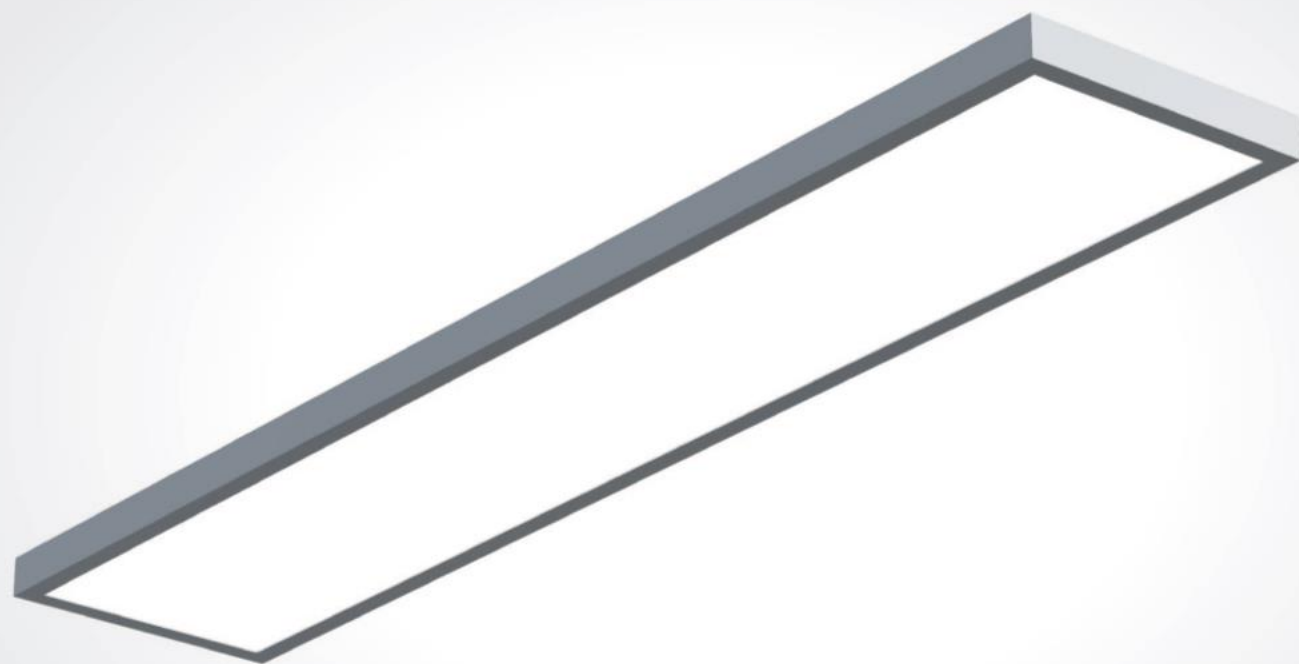

TECHNICAL DATA

Luminaire Wattage: 40W / 50W
Luminous Flux: 4400lm / 5500lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 100^\circ / 95^\circ \downarrow$
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open-plan office, training room, conference room etc.

Part No.	LM	Power	Dimming
BFRC-1204035-NN	1600lm / 3800lm ↓	15W / 35W ↓	On/off
BFRC-1204035-VN	1600lm / 3800lm ↓	15W / 35W ↓	1-10V dimming
BFRC-1204035-DN	1600lm / 3800lm ↓	15W / 35W ↓	Dali dimming
BFRC-1505045-NN	1700lm / 4800lm ↓	15W / 45W ↓	On/off
BFRC-1505045-VN	1700lm / 4800lm ↓	15W / 45W ↓	1-10V dimming
BFRC-1505045-DN	1700lm / 4800lm ↓	15W / 45W ↓	Dali dimming





WASE-C

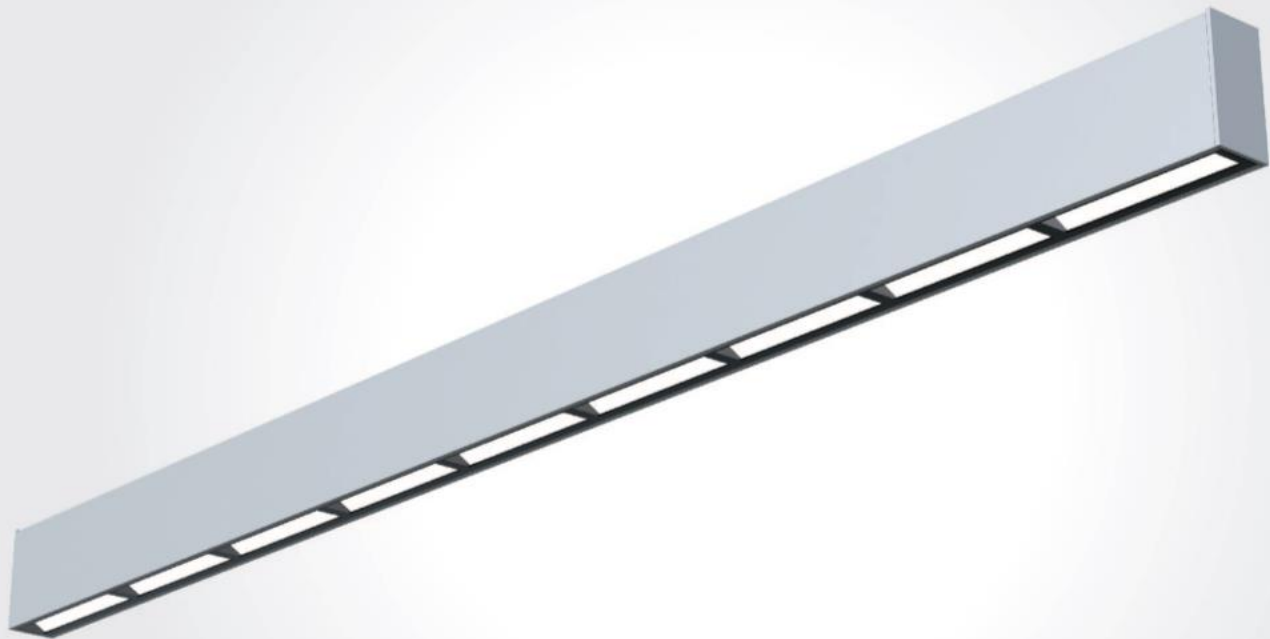

TECHNICAL DATA

Luminaire Wattage: 30W
Luminous Flux: 2800lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open-plan office, training room, stairs, corridors, etc.

Part No.	LM	Power	Dimming
BWAC-1203030-NN	2800lm	30W	On/off
BWAC-1203030-VN	2800lm	30W	1-10V dimming
BWAC-1203030-DN	2800lm	30W	Dali dimming





KISS-C

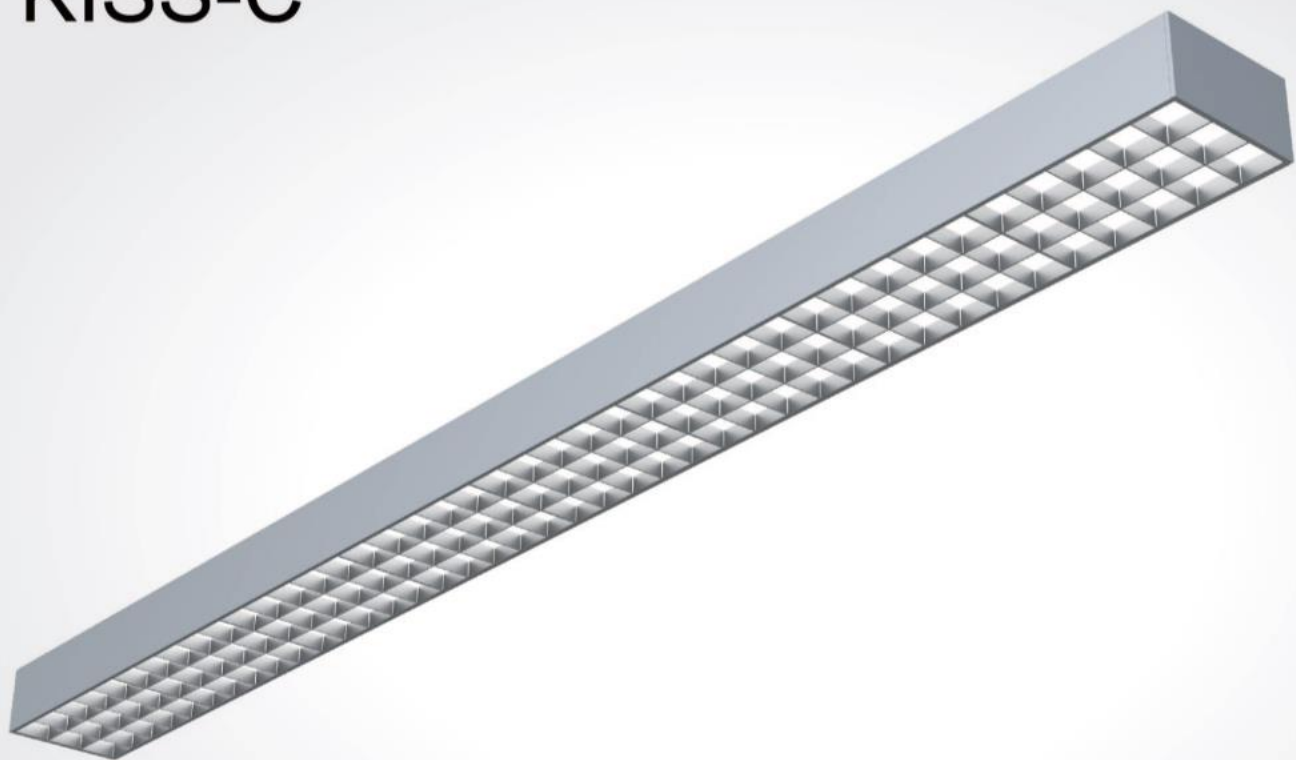

TECHNICAL DATA

Luminaire Wattage: 40W
Luminous Flux: 3200lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 85°
UGR: <17
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open plan office, meeting room, cafeteria and other office space.

Part No.	LM	Power	Dimming
BKIC-1204040-NN	3200lm	40W	On/off
BKIC-1204040-VN	3200lm	40W	1-10V dimming
BKIC-1204040-DN	3200lm	40W	Dali dimming



ROMI-C

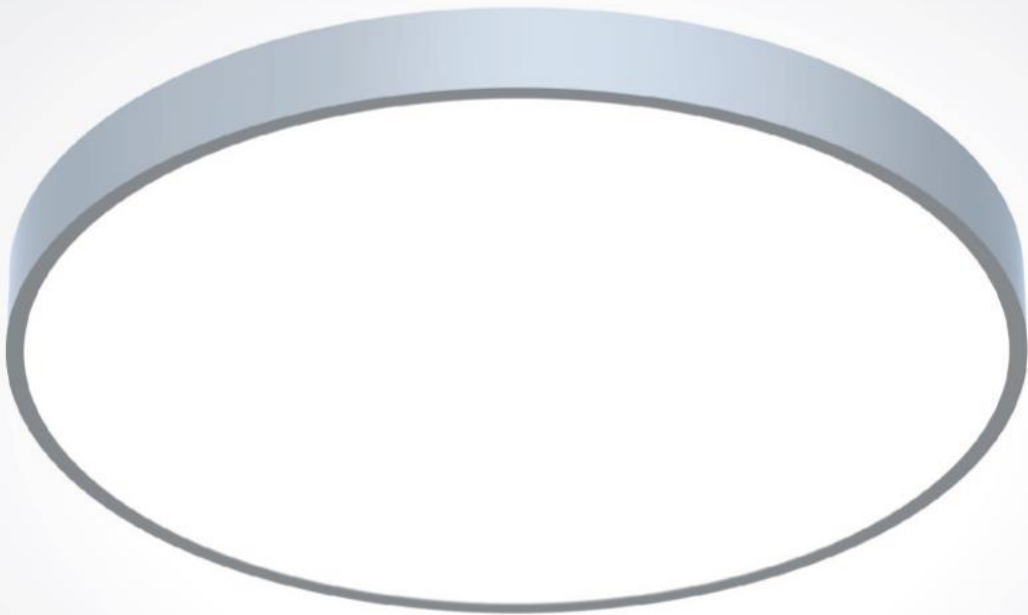

TECHNICAL DATA



Luminaire Wattage: 18W / 30W / 48W / 80W
Luminous Flux: 1700lm / 3100lm / 5250lm / 9000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 100^\circ / 95^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS


Open-plan office, Individual office, Cafeteria, Corridors, Break-out area, Classroom, etc.



Part No.	LM	Power	Dimming
BROC-3501812-NN	1500lm/1200lm	16W/12W	On/off
BROC-3501812-VN	1500lm/1200lm	16W/12W	1-10V dimming
BROC-3501812-DN	1500lm/1200lm	16W/12W	Dali dimming
BROP-4503021-NN	11000lm/2100lm	19W/21W	On/off
BROC-4503021-VN	11000lm/2100lm	19W/21W	1-10V dimming
BROC-4503021-DN	11000lm/2100lm	19W/21W	Dali dimming
BROC-6004834-NN	11750lm/3500lm	14W/34W	On/off
BROC-6004834-VN	11750lm/3500lm	14W/34W	1-10V dimming
BROC-6004834-DN	11750lm/3500lm	14W/34W	Dali dimming
BROC-9008056-NN	13400lm/5600lm	124W/56W	On/off
BROC-9008056-VN	13400lm/5600lm	124W/56W	1-10V dimming
BROC-9008056-DN	13400lm/5600lm	124W/56W	Dali dimming



SAMI-C

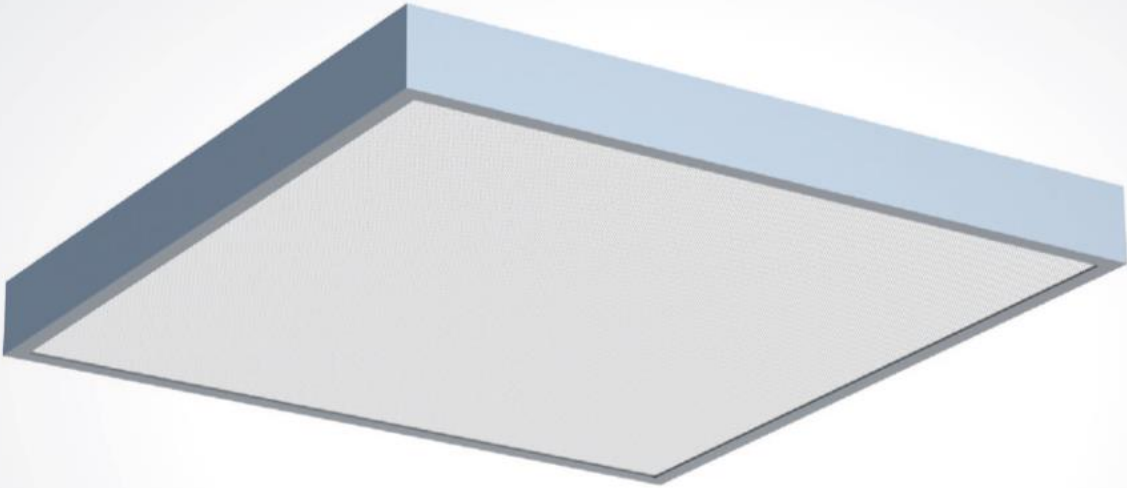

TECHNICAL DATA



Luminaire Wattage: 30W
Luminous Flux: 3100lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 100^\circ / 95^\circ \downarrow$
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS


Open-plan office, Individual office, Cafeteria, Corridors, Break-out area, Classroom, etc.



Part No.	LM	Power	Dimming
BSAC-4503021-NN	$\uparrow 1000\text{lm}/2100\text{lm} \downarrow$	$\uparrow 9\text{W}/21\text{W} \downarrow$	On/off
BSAC-4503021-VN	$\uparrow 1000\text{lm}/2100\text{lm} \downarrow$	$\uparrow 9\text{W}/21\text{W} \downarrow$	1-10V dimming
BSAC-4503021-DN	$\uparrow 1000\text{lm}/2100\text{lm} \downarrow$	$\uparrow 9\text{W}/21\text{W} \downarrow$	Dali dimming





ELFOO-C

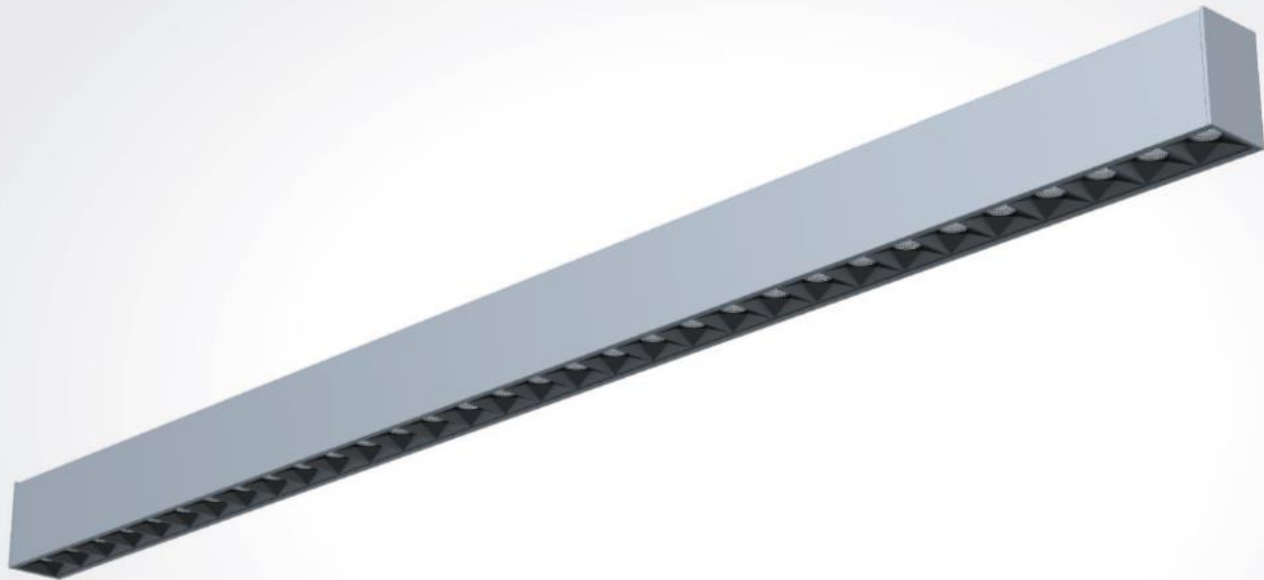

TECHNICAL DATA

Luminaire Wattage: 30W / 35W
Luminous Flux: 3200lm / 3600lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 80°
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open-planed office, training room conference room and classroom, etc.

Part No.	LM	Power	Dimming
BEFC-1203030-NN	3200lm	30W	On/off
BEFC-1203030-VN	3200lm	30W	1-10V dimming
BEFC-1203030-DN	3200lm	30W	Dali dimming
BEFC-1503535-NN	3600lm	35W	On/off
BEFC-1503535-VN	3600lm	35W	1-10V dimming
BEFC-1503535-DN	3600lm	35W	Dali dimming



ELFOO-C3

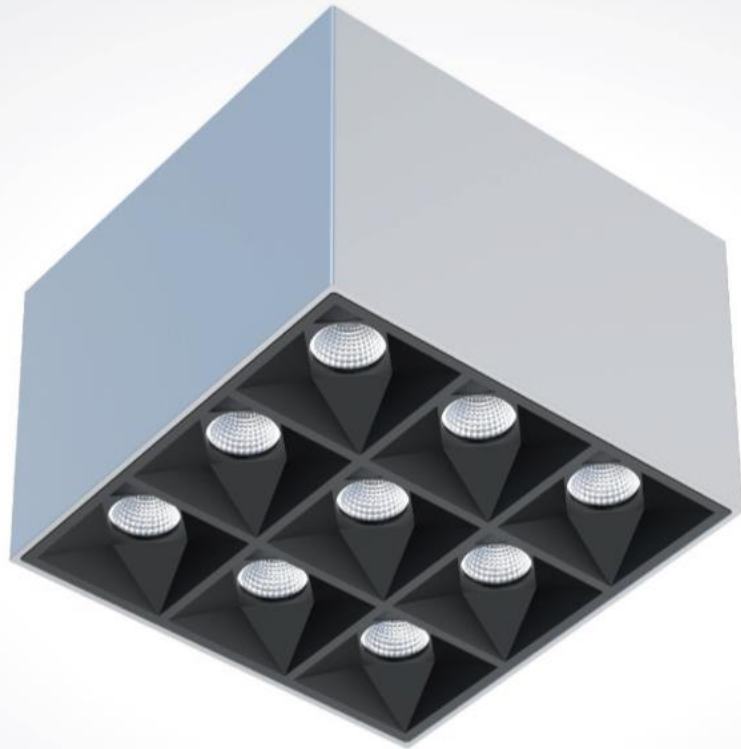

TECHNICAL DATA




Luminaire Wattage: 8W / 18W
Luminous Flux: 850lm / 1900lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 35° / 65°
UGR: <17
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS

Office corridor, washroom, staircase, etc.



Part No.	LM	Power	Dimming
BEFK-1200808-NN	850lm	8W	On/off
BEFK-1200808-VN	850lm	8W	1-10V dimming
BEFK-1200808-DN	850lm	8W	Dali dimming
BEFK-1201818-NN	1900lm	18W	On/off
BEFK-1201818-VN	1900lm	18W	1-10V dimming
BEFK-1201818-DN	1900lm	18W	Dali dimming



LICON-C



TECHNICAL DATA



Luminaire Wattage: 40W / 50W
Luminous Flux: 3600lm / 4500lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 80°
UGR: <22
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS


Open-plan office, reception, training room, cafeteria, etc.



Part No.	LM	Power	Dimming
BLIC-1204040-NN	3600lm	40W	On/off
BLIC-1204040-VN	3600lm	40W	1-10V dimming
BLIC-1204040-DN	3600lm	40W	Dali dimming
BLIC-1505050-NN	4500lm	50W	On/off
BLIC-1505050-VN	4500lm	50W	1-10V dimming
BLIC-1505050-DN	4500lm	50W	Dali dimming



LENO-C1

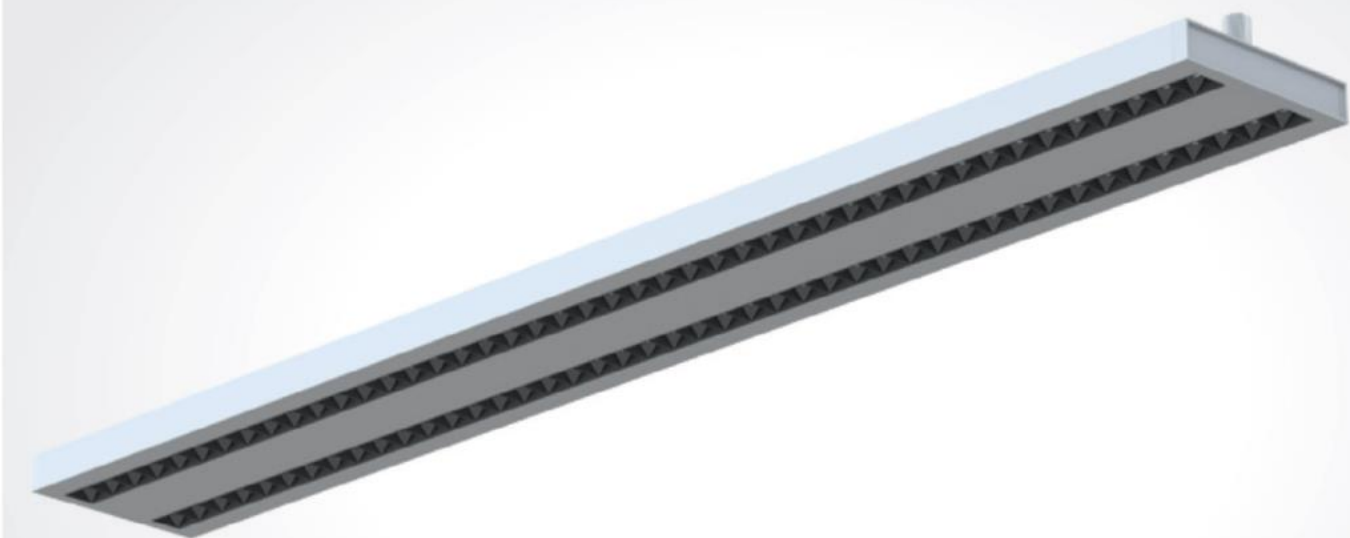

TECHNICAL DATA



Luminaire Wattage: 40W
Luminous Flux: 4500lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 50°
UGR: <10
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS


Open-plan office, Individual office, small meeting room, reception, etc.



Part No.	LM	Power	Dimming
BLEC1-1204040-NN	4500lm	40W	On/off
BLEC1-1204040-VN	4500lm	40W	1-10V dimming
BLEC1-1204040-DN	4500lm	40W	Dali dimming



LENO-C2

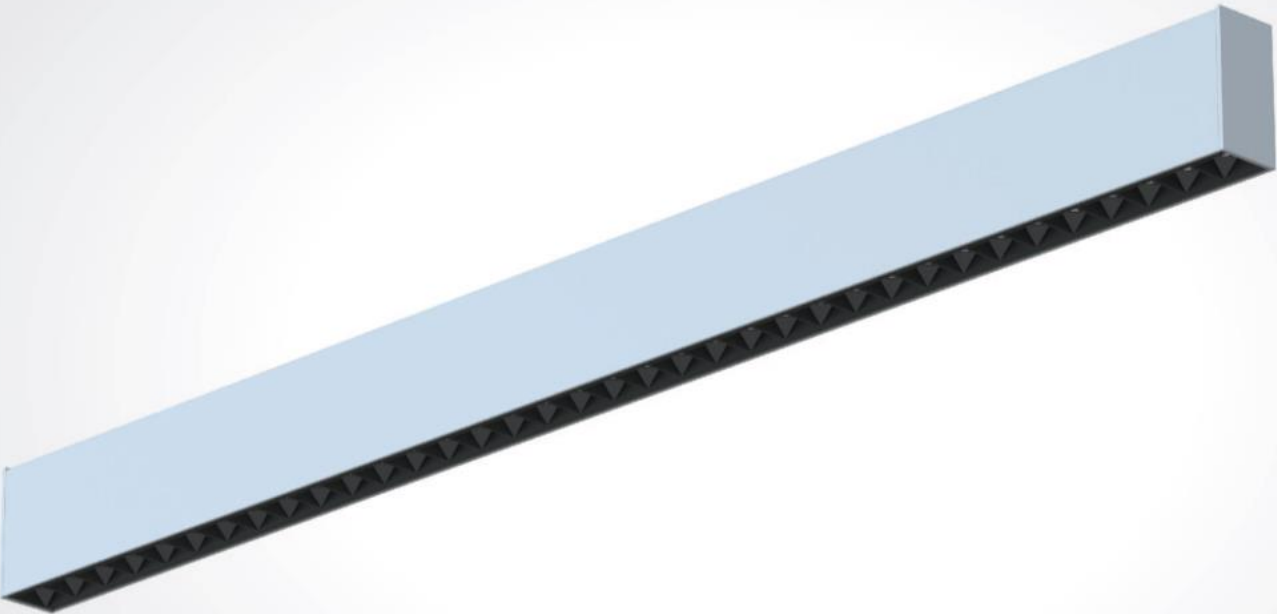

TECHNICAL DATA



Luminaire Wattage: 30W / 40W
Luminous Flux: 3000lm / 4000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 50°
UGR: <10
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS


Open-plan office, Individual office, small meeting room, reception, etc.



Part No.	LM	Power	Dimming
BLEC2-0903030-NN	3000lm	30W	On/off
BLEC2-0903030-VN	3000lm	30W	1-10V dimming
BLEC2-0903030-DN	3000lm	30W	Dali dimming
BLEC2-1204040-NN	4000lm	40W	On/off
BLEC2-1204040-VN	4000lm	40W	1-10V dimming
BLEC2-1204040-DN	4000lm	40W	Dali dimming





MAYE-CR0

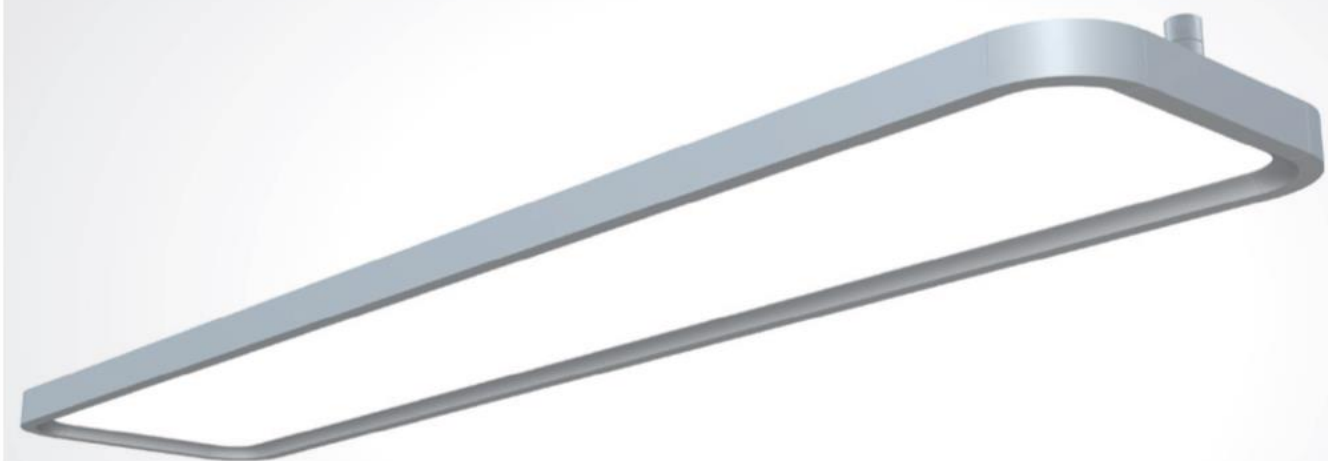

TECHNICAL DATA

Luminaire Wattage: 60W
Luminous Flux: 5700lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS



APPLICATION AREAS

Open-plan office, training room, cafeteria, Guest room

Part No.	LM	Power	Dimming
BMRC-1206050-NN	$\uparrow 1200\text{lm}/4500\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	On/off
BMRC-1206050-VN	$\uparrow 1200\text{lm}/4500\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	1-10V dimming
BMRC-1206050-DN	$\uparrow 1200\text{lm}/4500\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	Dali dimming



MAYE-CR1



TECHNICAL DATA



Luminaire Wattage: 60W
Luminous Flux: 5700lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS

Open-plan office, breakout area, cafeteria, Guest room



Part No.	LM	Power	Dimming
BMRC-6106050-NN	$\uparrow 1450\text{lm}/4250\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	On/off
BMRC-6106050-VN	$\uparrow 1450\text{lm}/4250\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	1-10V dimming
BMRC-6106050-DN	$\uparrow 1450\text{lm}/4250\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	Dali dimming



MAYE-CS0



TECHNICAL DATA

Luminaire Wattage: 60W
Luminous Flux: 5700lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS

Silver White Black

APPLICATION AREAS

Open-plan office, training room, cafeteria, Guest room



Part No.	LM	Power	Dimming
BMSC-1206050-NN	$\uparrow 1200\text{lm}/4500\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	On/off
BMSC-1206050-VN	$\uparrow 1200\text{lm}/4500\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	1-10V dimming
BMSC-1206050-DN	$\uparrow 1200\text{lm}/4500\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	Dali dimming





MAYE-CS1



TECHNICAL DATA

Luminaire Wattage: 60W
Luminous Flux: 5700lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS



APPLICATION AREAS

Open-plan office, breakout area, cafeteria, Guest room

Part No.	LM	Power	Dimming
BMSC-6106050-NN	$\uparrow 1450\text{lm}/4250\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	On/off
BMSC-6106050-VN	$\uparrow 1450\text{lm}/4250\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	1-10V dimming
BMSC-6106050-DN	$\uparrow 1450\text{lm}/4250\text{lm} \downarrow$	$\uparrow 10\text{W}/50\text{W} \downarrow$	Dali dimming





RECESSED LUMINAIRES



123 ELFOO-D2



125 ELFOO-D3



127 ELFOO-D4



129 ELFOO-D5



131 WASE-R




133 LENO-R0



135 LENO-R1

ELFOO-D2

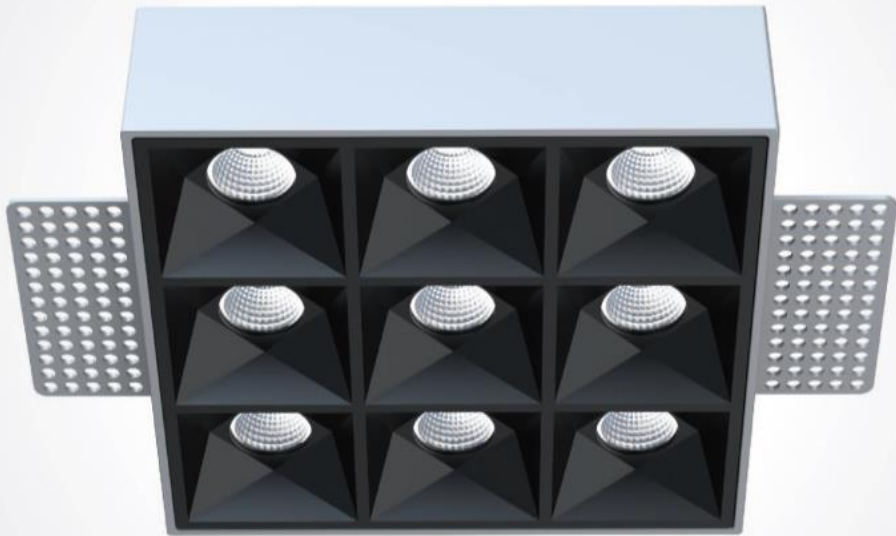

TECHNICAL DATA





Luminaire Wattage: 8W / 18W
Luminous Flux: 850lm / 1900lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 35° / 65°
UGR: <17
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS

Office corridor, washroom, staircase, etc.



Part No.	LM	Power	Dimming
BEFS-1200808-NN	850lm	8W	On/off
BEFS-1200808-VN	850lm	8W	1-10V dimming
BEFS-1200808-DN	850lm	8W	Dali dimming
BEFS-1201818-NN	1900lm	18W	On/off
BEFS-1201818-VN	1900lm	18W	1-10V dimming
BEFS-1201818-DN	1900lm	18W	Dali dimming



ELFOO-D3



TECHNICAL DATA





Luminaire Wattage: 8W / 18W
Luminous Flux: 850lm / 1900lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 35° / 65°
UGR: <17
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS

Office corridor, washroom, staircase, etc.



Part No.	LM	Power	Dimming
BEFQ-1400808-NN	850lm	8W	On/off
BEFQ-1400808-VN	850lm	8W	1-10V dimming
BEFQ-1400808-DN	850lm	8W	Dali dimming
BEFQ-1401818-NN	1900lm	18W	On/off
BEFQ-1401818-VN	1900lm	18W	1-10V dimming
BEFQ-1401818-DN	1900lm	18W	Dali dimming



ELFOO-D4



TECHNICAL DATA




Luminaire Wattage: 6W
Luminous Flux: 778lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 55°
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS

Office corridor, washroom, staircase, etc.



Part No.	LM	Power	Dimming
BEFQ-1800606-NN	778lm	6W	On/off
BEFQ-1800606-VN	778lm	6W	1-10V dimming
BEFQ-1800606-DN	778lm	6W	Dali dimming



ELFOO-D5



TECHNICAL DATA




Luminaire Wattage: 12W
Luminous Flux: 1552lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 55°
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS

Office corridor, washroom, staircase, etc.



Part No.	LM	Power	Dimming
BEFQ-3401212-NN	1552lm	12W	On/off
BEFQ-3401212-VN	1552lm	12W	1-10V dimming
BEFQ-3401212-DN	1552lm	12W	Dali dimming





WASE-R



TECHNICAL DATA

Luminaire Wattage: 30W
Luminous Flux: 2800lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS



APPLICATION AREAS

Open-plan office, training room, stairs, corridors, etc.

Part No.	LM	Power	Dimming
BWAX-1203030-NN	2800lm	30W	On/off
BWAX-1203030-VN	2800lm	30W	1-10V dimming
BWAX-1203030-DN	2800lm	30W	Dali dimming



LENO-R0



TECHNICAL DATA




Luminaire Wattage: 30W / 40W
Luminous Flux: 3000lm / 4000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 50°
UGR: <10
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS




APPLICATION AREAS


Open-plan office, small office, meeting room, reception.



Part No.	LM	Power	Dimming
BLEX-0903030-NN	3000lm	30W	On/off
BLEX-0903030-VN	3000lm	30W	1-10V dimming
BLEX-0903030-DN	3000lm	30W	Dali dimming
BLEX-1204040-NN	4000lm	40W	On/off
BLEX-1204040-VN	4000lm	40W	1-10V dimming
BLEX-1204040-DN	4000lm	40W	Dali dimming


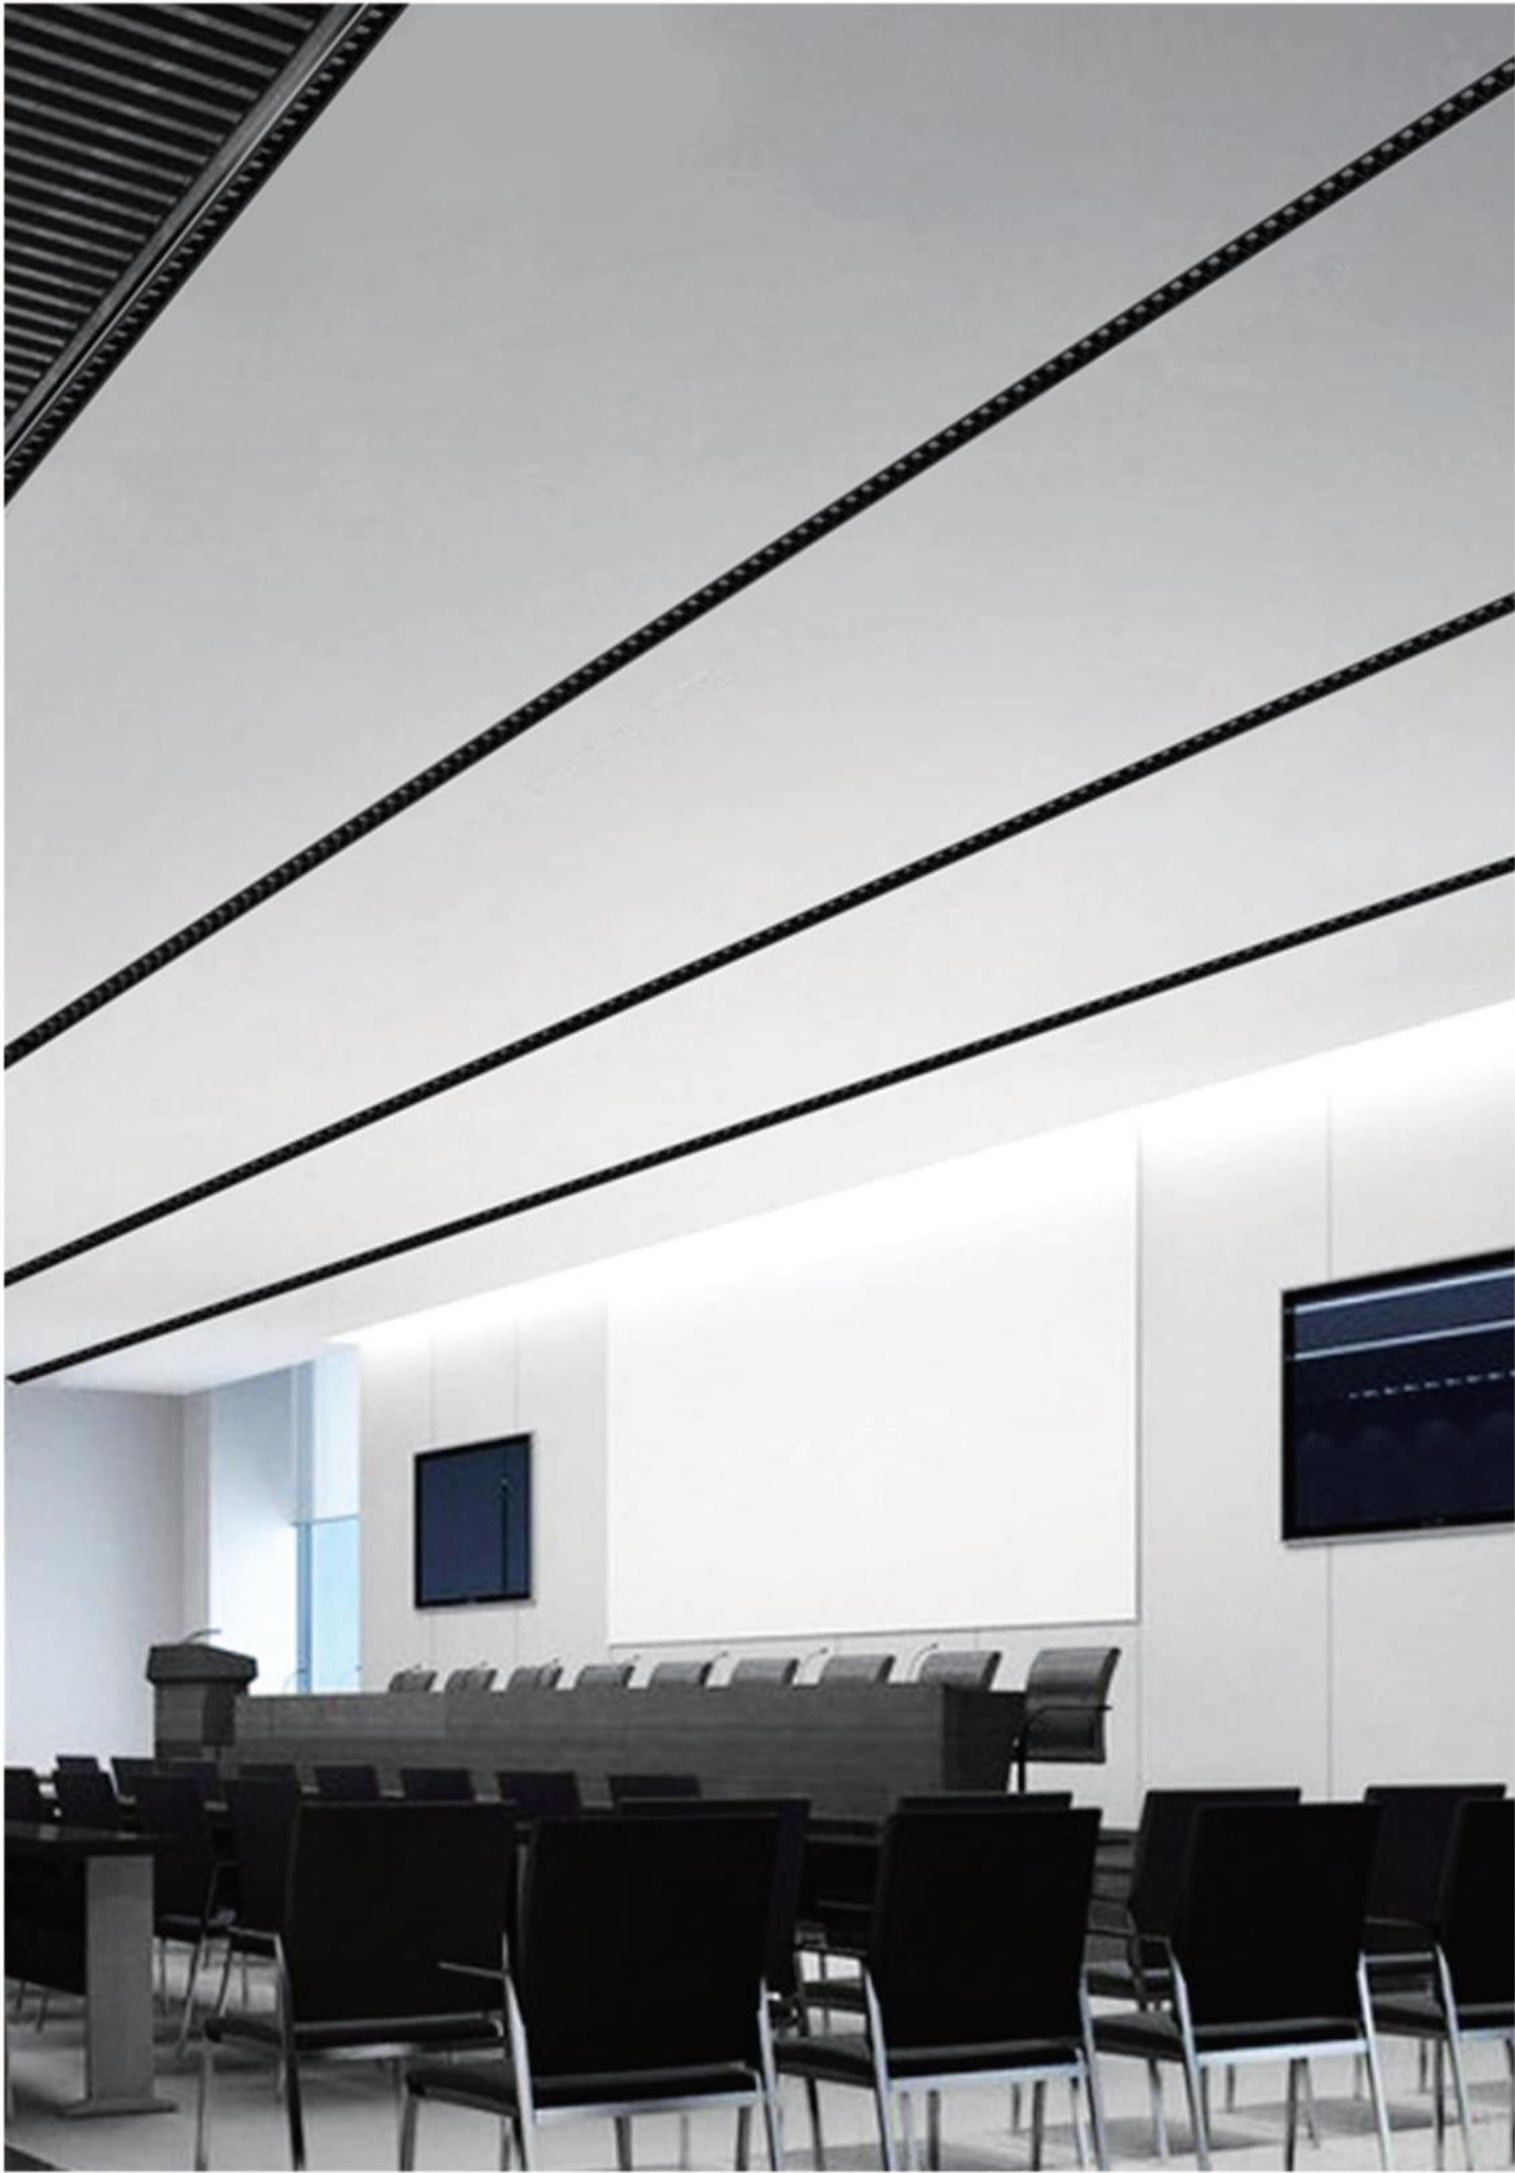


LENO-R1

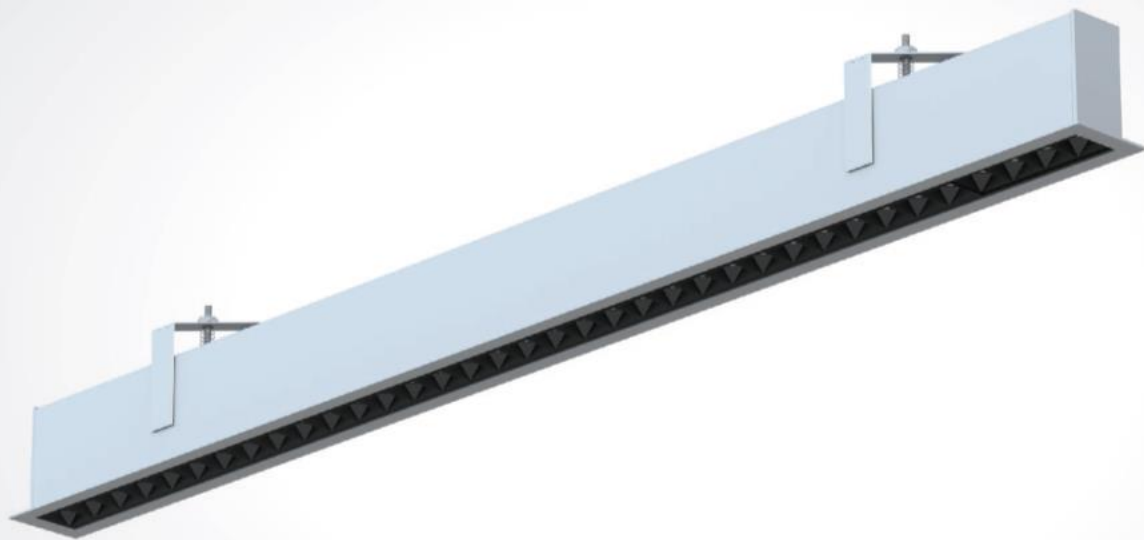

TECHNICAL DATA

Luminaire Wattage: 30W / 40W
Luminous Flux: 3000lm / 4000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: 50°
UGR: <10
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS




APPLICATION AREAS

Open-plan office, small office, meeting room, reception.

Part No.	LM	Power	Dimming
BLEY-0903030-NN	3000lm	30W	On/off
BLEY-0903030-VN	3000lm	30W	1-10V dimming
BLEY-0903030-DN	3000lm	30W	Dali dimming
BLEY-1204040-NN	4000lm	40W	On/off
BLEY-1204040-VN	4000lm	40W	1-10V dimming
BLEY-1204040-DN	4000lm	40W	Dali dimming



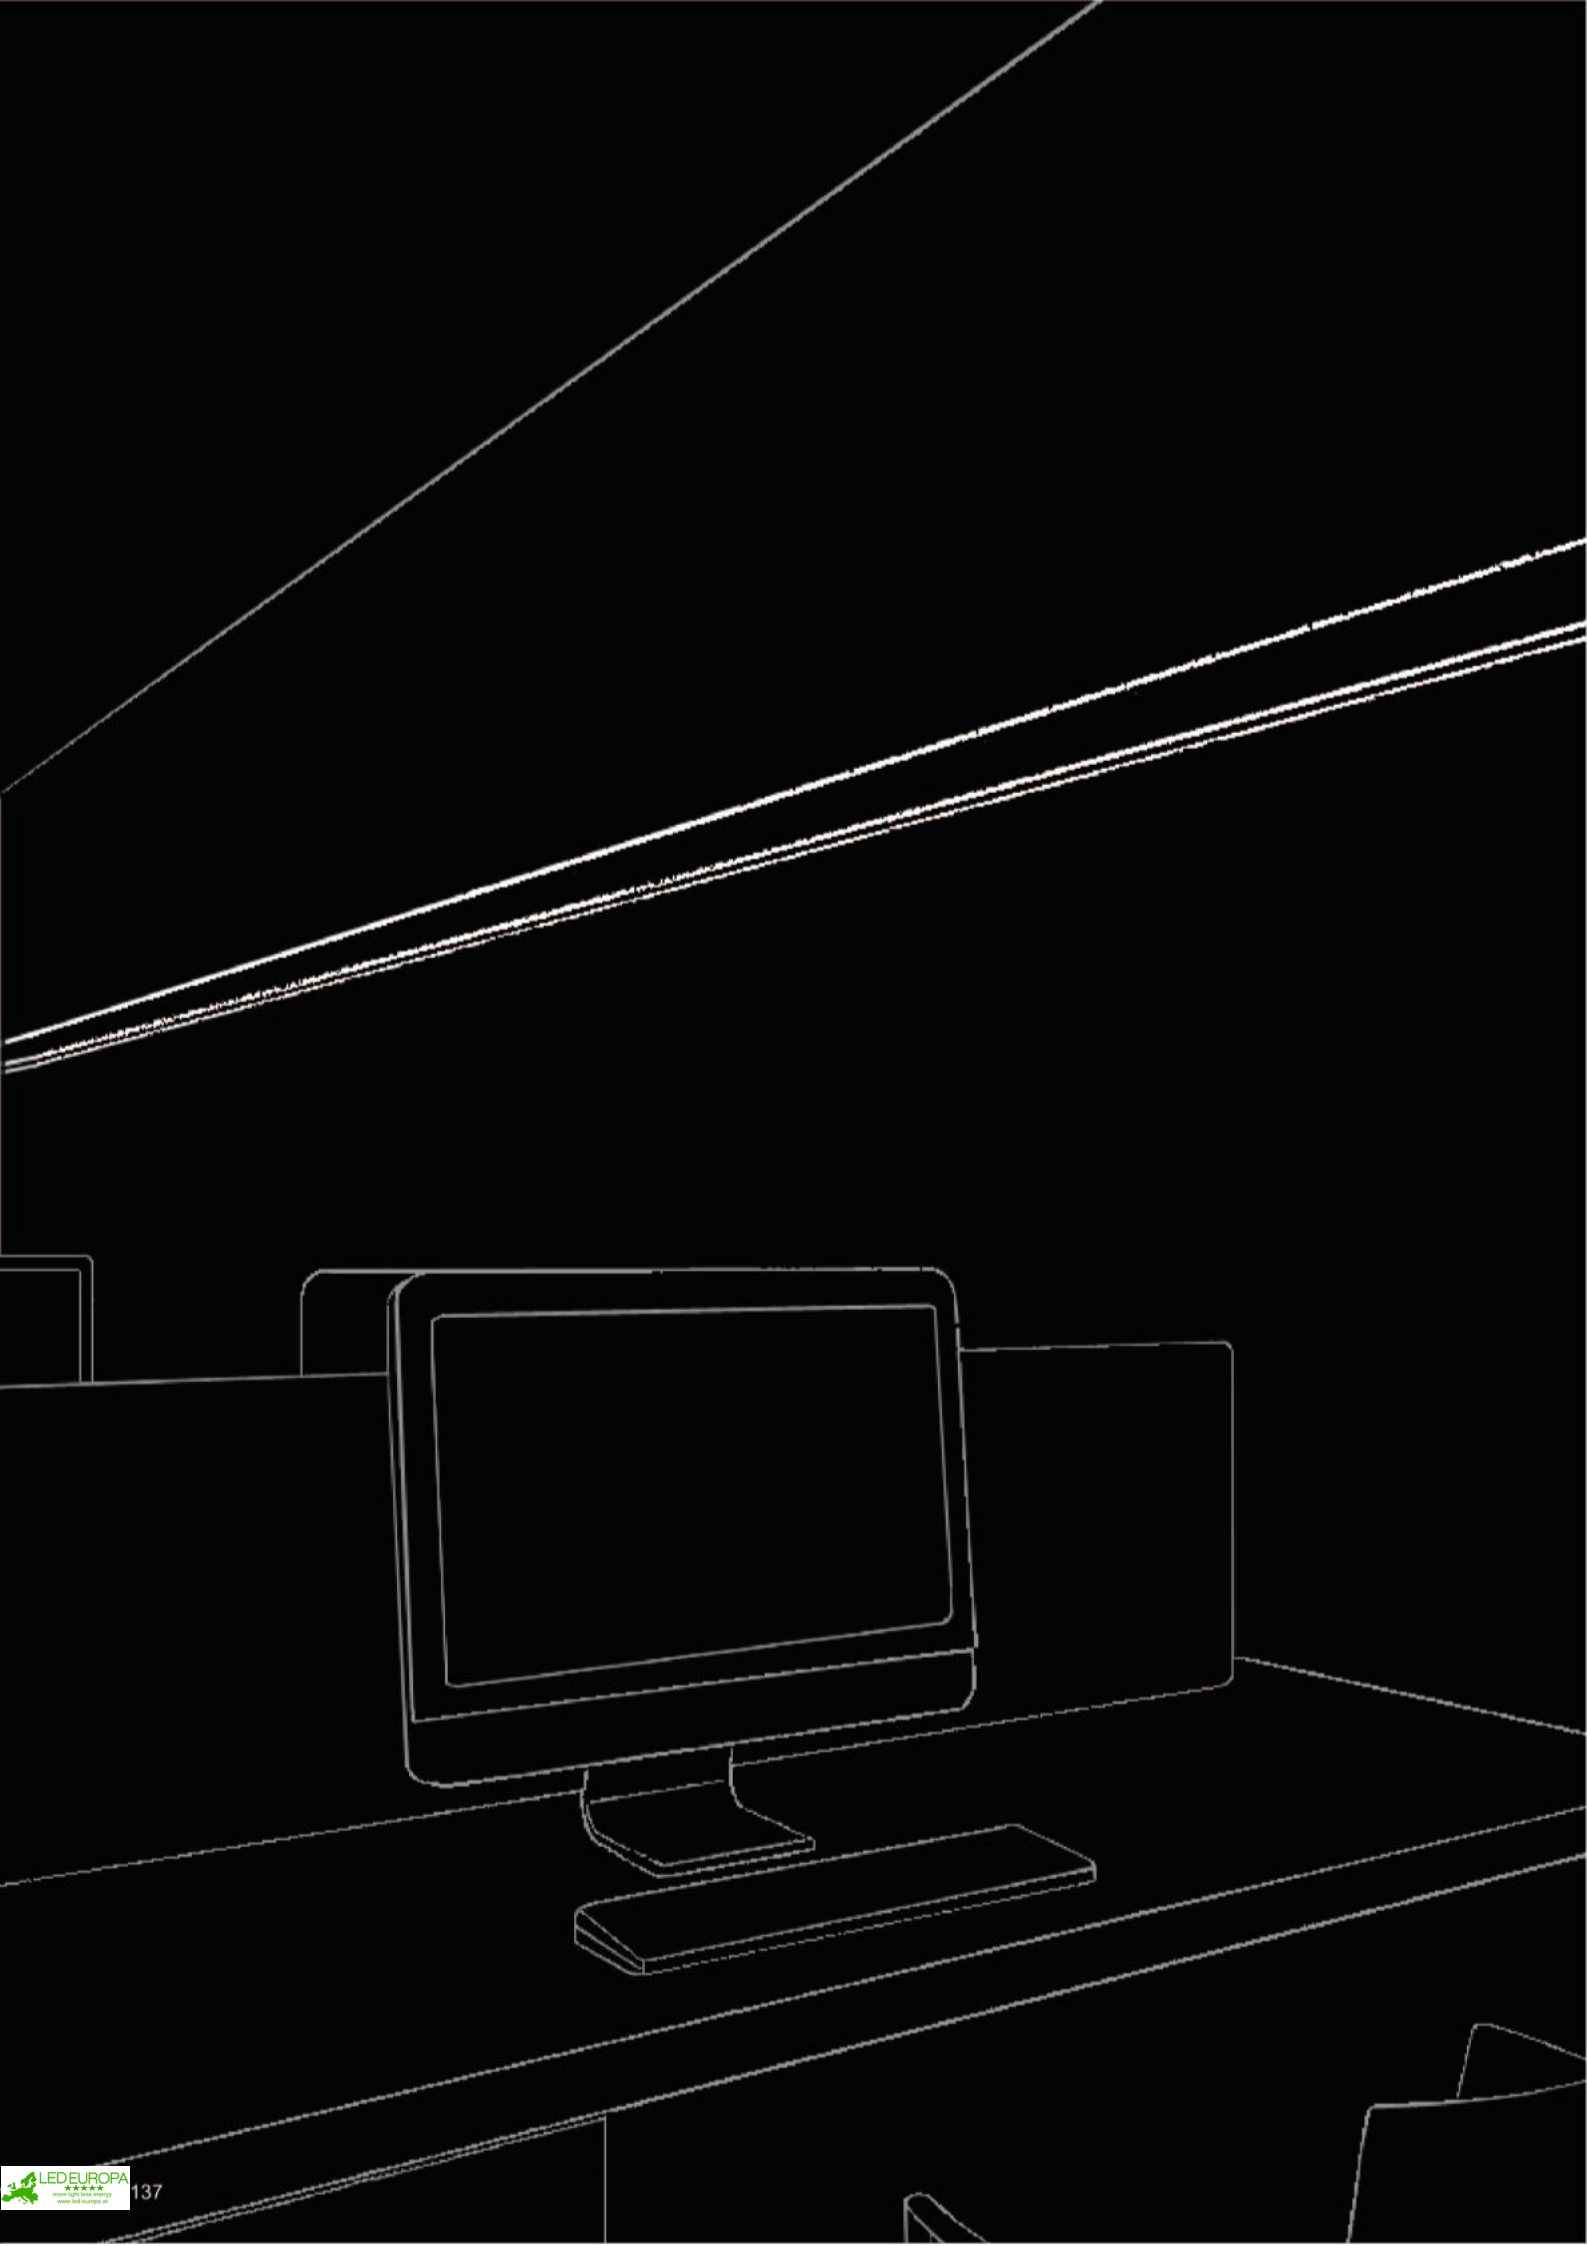

WALL MOUNTED LUMINAIRES



139 NEWA



141 LICON-W



143 MAYE-WR



145 MAYE-WS

NEWA



TECHNICAL DATA



Luminaire Wattage: 30W / 50W
Luminous Flux: 3600lm / 6000lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS

Open plan office, stairs, corridors and other office space.



Part No.	LM	Power	Dimming
BNEW-1203015-NN	↑1800lm/1800lm ↓	↑15W/15W ↓	On/off
BNEW-1203015-VN	↑1800lm/1800lm ↓	↑15W/15W ↓	1-10V dimming
BNEW-1203015-DN	↑1800lm/1800lm ↓	↑15W/15W ↓	Dali dimming
BNEW-1805025-NN	↑3000lm/3000lm ↓	↑25W/25W ↓	On/off
BNEW-1805025-VN	↑3000lm/3000lm ↓	↑25W/25W ↓	1-10V dimming
BNEW-1805025-DN	↑3000lm/3000lm ↓	↑25W/25W ↓	Dali dimming





LICON-W



TECHNICAL DATA

Luminaire Wattage: 40W / 50W / 60W
Luminous Flux: 3600lm / 4500lm / 5400lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
UGR: <19
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS



APPLICATION AREAS

Open plan office, stairs, corridors and other office space.

Product

Part No.	LM	Power	Dimming
BLIW-1204020-NN	↑1800lm/1800lm ↓	↑20W/20W ↓	On/off
BLIW-1204020-VN	↑1800lm/1800lm ↓	↑20W/20W ↓	1-10V dimming
BLIW-1204020-DN	↑1800lm/1800lm ↓	↑20W/20W ↓	Dali dimming
BLIW-1505025-NN	↑2250lm/2250lm ↓	↑25W/25W ↓	On/off
BLIW-1505025-VN	↑2250lm/2250lm ↓	↑25W/25W ↓	1-10V dimming
BLIW-1505025-DN	↑2250lm/2250lm ↓	↑25W/25W ↓	Dali dimming
BLIW-1806030-NN	↑2700lm/2700lm ↓	↑30W/30W ↓	On/off
BLIW-1806030-VN	↑2700lm/2700lm ↓	↑30W/30W ↓	1-10V dimming
BLIW-1806030-DN	↑2700lm/2700lm ↓	↑30W/30W ↓	Dali dimming



MAYE-WR



TECHNICAL DATA



Luminaire Wattage: 40W
Luminous Flux: 3600lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years

COLOURS



APPLICATION AREAS


Open plan office, stairs, corridors, lobby, Break out area etc.



Part No.	LM	Power	Dimming
BMRW-6104040-NN	$\uparrow 1800\text{lm}/1800\text{lm} \downarrow$	$\uparrow 20\text{W}/20\text{W} \downarrow$	On/off
BMRW-6104040-VN	$\uparrow 1800\text{lm}/1800\text{lm} \downarrow$	$\uparrow 20\text{W}/20\text{W} \downarrow$	1-10V dimming
BMRW-6104040-DN	$\uparrow 1800\text{lm}/1800\text{lm} \downarrow$	$\uparrow 20\text{W}/20\text{W} \downarrow$	Dali dimming





MAYE-WS

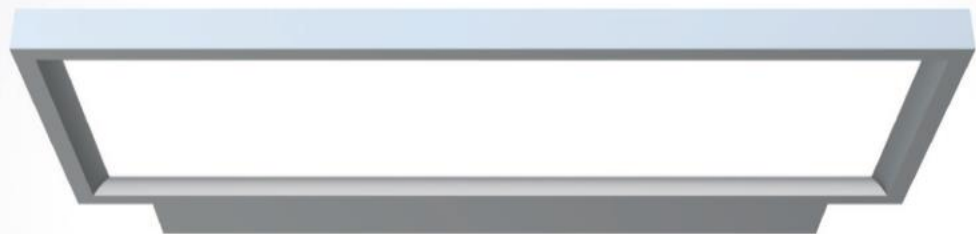

TECHNICAL DATA

Luminaire Wattage: 40W
Luminous Flux: 3600lm
Correlated Colour Temperature: 3000K/4000K/6000K
Colour Rendering Index: >80
Symmetrical Distribution: $\uparrow 110^\circ / 90^\circ \downarrow$
UGR: <18
Protection Rating: IP20
Longevity: 50,000Hrs L80 B10
Dimming: 1-10V dimming / Dali dimming
Warranty: 5 years



COLOURS



APPLICATION AREAS

Open plan office, stairs, corridors, lobby, Break out area etc.

Part No.	LM	Power	Dimming
BMSW-6104040-NN	$\uparrow 1800\text{lm}/1800\text{lm} \downarrow$	$\uparrow 20\text{W}/20\text{W} \downarrow$	On/off
BMSW-6104040-VN	$\uparrow 1800\text{lm}/1800\text{lm} \downarrow$	$\uparrow 20\text{W}/20\text{W} \downarrow$	1-10V dimming
BMSW-6104040-DN	$\uparrow 1800\text{lm}/1800\text{lm} \downarrow$	$\uparrow 20\text{W}/20\text{W} \downarrow$	Dali dimming

